

**TS-3GA-36.414(Rel10)v10.1.0**

**Evolved Universal Terrestrial Radio  
Access Network (E-UTRAN); S1 data  
transport**

2011年8月31日制定

一般社団法人  
情報通信技術委員会

THE TELECOMMUNICATION TECHNOLOGY COMMITTEE

本書は、一般社団法人情報通信技術委員会が著作権を保有しています。  
内容の一部又は全部を一般社団法人情報通信技術委員会の許諾を得ることなく複製、  
転載、改変、転用及びネットワーク上での送信、配布を行うことを禁止します。

<参考> [Remarks]

1. 英文記述の適用レベル [Application level of English description]

適用レベル [Application level] : E2

本標準の本文、付属資料および付録の文章および図に英文記述を含んでいる。

[English description is included in the text and figures of main body, annexes and appendices.]

2. 国際勧告等の関連 [Relationship with international recommendations and standards]

本標準は、3GPP で承認された Technical Specification 36.414 (Version 10.1.0) に準拠している。

[This standard is standardized based on the Technical Specification 36.414 (Version 10.1.0) approved by 3GPP.]

3. 上記国際勧告等に対する追加項目等 [Departures from international recommendations]

原標準に対する変更項目 [Changes to original standard]

原標準が参照する標準のうち、TTC 標準に置き換える項目。 [Standards referred to in the original standard, which are replaced by TTC standards.]

原標準が参照する標準のうち、それらに準拠した TTC 標準等が制定されている場合は自動的に最新版 TTC 標準等に置き換え参照するものとする。 [Standards referred to in the original standard should be replaced by derived TTC standards.]

4. 工業所有権 [IPR]

本標準に関わる「工業所有権等の実施の権利に係る確認書」の提出状況は、TTC ホームページによる。

[Status of “Confirmation of IPR Licensing Condition” submitted is provided in the TTC web site.]

5. 作成専門委員会 [Working Group]

3GPP 専門委員会 [3GPP Working Group]

# 3GPP TS 36.414 V10.1.0 (2011-06)

---

*Technical Specification*

**3rd Generation Partnership Project;  
Technical Specification Group Radio Access Network;  
Evolved Universal Terrestrial Radio Access Network  
(E-UTRAN);  
S1 data transport  
(Release 10)**



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP<sup>TM</sup>) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP<sup>TM</sup> system should be obtained via the 3GPP Organizational Partners' Publications Offices.

---

---

Keywords

LTE, radio

**3GPP**

---

Postal address

---

3GPP support office address

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

---

Internet

<http://www.3gpp.org>

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2011, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TTA, TTC).  
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
LTE™ is a Trade Mark of ETSI currently being registered for the benefit of its Members and of the 3GPP Organizational Partners  
GSM® and the GSM logo are registered and owned by the GSM Association

---

# Contents

Foreword .....	4
1 Scope .....	5
2 References .....	5
3 Definitions, symbols and abbreviations .....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	5
4 Data Link Layer .....	6
5 S1 Interface user plane protocol .....	6
5.1 General .....	6
5.2 GTP-U .....	6
5.3 UDP/IP .....	6
5.4 Diffserv code point marking .....	7
<b>Annex A (informative): Change History .....</b>	<b>8</b>

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document specifies the standards for user data transport protocols and related signalling protocols to establish user plane transport bearers over the S1 interface.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 29.281: "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)".
- [3] IETF RFC 768 (1980-08): "User Datagram Protocol".
- [4] IETF RFC 2474 (1998-12): "Definition of the Differentiated Services Field (DS Field) in the Ipv4 and Ipv6 Headers".
- [5] IETF RFC 2460 (1998-12): "Internet Protocol, Version 6 (IPv6) Specification".
- [6] IETF RFC 791 (1981-09): "Internet Protocol".
- [7] 3GPP TS 36.401: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Architecture description".

---

# 3 Definitions, symbols and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following terms and definitions below apply. Terms and definitions not defined below can be found in TR 21.905 [1].

**S1:** interface between an eNB and an EPC, providing an interconnection point between the EUTRAN and the EPC. It is also considered as a reference point.

**E-RAB:** as defined in TS 36.401 [7].

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

eNB	E-UTRAN Node B
EPC	Evolved Packet Core
E-RAB	E-UTRAN Radio Access Bearer



E-UTRAN	Evolved UTRAN
GTP	GPRS Tunnelling Protocol
IP	Internet Protocol
TEID	Tunnel Endpoint Identifier
UDP	User Datagram Protocol

---

## 4 Data Link Layer


Any data link protocol that fulfils the requirements toward the upper layer may be used.

---

## 5 S1 Interface user plane protocol

### 5.1 General

The transport layer for data streams over S1 is an IP based Transport. The following figure shows the transport protocol stacks over S1.

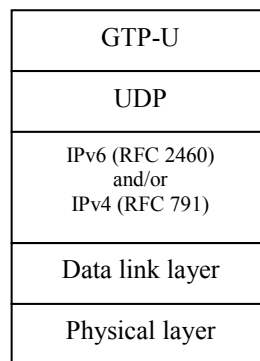

**Figure 6.1: Transport network layer for data streams over S1**

The GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for data streams on the S1 interface. The data link layer is as specified in clause 4.

The transport bearer is identified by the GTP-U TEID (TS 29.281 [2]) and the IP address (source TEID, destination TEID, source IP address, destination IP address).

### 5.2 GTP-U

The GTP-U (TS 29.281 [2]) protocol shall be used over the S1 interface toward the EPC.

### 5.3 UDP/IP

The path protocol used shall be UDP (IETF RFC 768 [3]).

The UDP port number for GTP-U shall be as defined in TS 29.281 [2].

The eNB and the EPC shall support fragmentation and assembly of GTP packets at the IP layer.

The eNB and the EPC shall support IPv6 (IETF RFC 2460 [5]) and/or IPv4 (IETF RFC 791 [6]).

There may be one or several IP addresses in the eNB and in the EPC. The packet processing function in the EPC shall send downstream packets of a given E-RAB to the eNB IP address (received in S1-AP) associated to that particular E-RAB. The packet processing function in the eNB shall send upstream packets of a given E-RAB to the EPC IP address (received in S1-AP) associated to that particular E-RAB.

The Transport Layer Address signalled in S1-AP messages is a bit string of

- a) 32 bits in case of IPv4 address according to IETF RFC 791 [6]; and
- b) 128 bits in case of IPv6 address according to IETF RFC 2460 [5].

## 5.4 Diffserv code point marking

IP Differentiated Services code point marking (IETF RFC 2474 [4]) shall be supported. The mapping between traffic categories and Diffserv code points shall be configurable by O&M based on QoS Class Identifier (QCI) Characteristics and others E-UTRAN traffic parameters. Traffic categories are implementation-specific and may be determined from the application parameters.

## Annex A (informative): Change History

TSG #	TSG Doc.	CR	Rev	Subject/Comment	New
38				specification approved at TSG-RAN and placed under change control	8.0.0
39	RP-080078	0001	1	Data link layer proposal	8.1.0
39	RP-080078	0002		Editorial correction on 36.414	8.1.0
40	RP-080302	0003	1	eGTP draft reference for S1 Data Transport	8.2.0
40	RP-080302	0005		Define format for TLA signalled in S1AP messages	8.2.0
42	RP-080845	0006		Correction of invalid references	8.3.0
42	RP-080845	0007		Correction of SAE Bearers	8.3.0
43	RP-090083	0008		Correction on GTP-U version	8.4.0
12/2009	-	-	-	Creation of Rel-9 version based on v8.4.0	9.0.0
12/2010				Creation of Rel-10 version based on v 9.0.0	10.0.0
SP-49	SP-100629			Clarification on the use of References (TS 21.801 CR#0030)	10.0.1
52	RP-110684	0009		Correction of references	10.1.0