

# TS-3GA-36.424(Rel12)v12.2.0

## Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 data transport

2015年6月30日制定

一般社団法人  
情報通信技術委員会

THE TELECOMMUNICATION TECHNOLOGY COMMITTEE

本書は、一般社団法人情報通信技術委員会が著作権を保有しています。  
内容の一部又は全部を一般社団法人情報通信技術委員会の許諾を得ることなく複製、  
転載、改変、転用及びネットワーク上での送信、配布を行うことを禁止します。

<参考> [Remarks]

1. 英文記述の適用レベル [Application level of English description]

適用レベル [Application level] : E2

本標準の本文、付属資料および付録の文章および図に英文記述を含んでいる。

[English description is included in the text and figures of main body, annexes and appendices.]

2. 国際勧告等の関連 [Relationship with international recommendations and standards]

本標準は、3GPP で承認された Technical Specification 36.424 (Version 12.2.0) に準拠している。

[This standard is standardized based on the Technical Specification 36.424 (Version 12.2.0) approved by 3GPP.]

3. 上記国際勧告等に対する追加項目等 [Departures from international recommendations]

原標準に対する変更項目 [Changes to original standard]

原標準が参照する標準のうち、TTC 標準に置き換える項目。 [Standards referred to in the original standard, which are replaced by TTC standards.]

原標準が参照する標準のうち、それらに準拠した TTC 標準等が制定されている場合は自動的に最新版 TTC 標準等に置き換え参照するものとする。 [Standards referred to in the original standard should be replaced by derived TTC standards.]

4. 工業所有権 [IPR]

本標準に関わる「工業所有権等の実施の権利に係る確認書」の提出状況は、TTC ホームページによる。

[Status of “Confirmation of IPR Licensing Condition” submitted is provided in the TTC web site.]

5. 作成専門委員会 [Working Group]

3GPP 専門委員会 [3GPP Working Group]

# 3GPP TS 36.424 V12.2.0 (2015-03)

---

*Technical Specification*

**3rd Generation Partnership Project;  
Technical Specification Group Radio Access Network;  
Evolved Universal Terrestrial Radio Access Network  
(E-UTRAN);  
X2 data transport  
(Release 12)**



---

Keywords

Transport, Tunnelling, LTE, radio

**3GPP**

---

Postal address

---

3GPP support office address

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

---

Internet

<http://www.3gpp.org>

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2015, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).  
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
LTE™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
GSM® and the GSM logo are registered and owned by the GSM Association

---

# Contents

Foreword .....	4
1 Scope .....	5
2 References .....	5
3 Definitions, symbols and abbreviations .....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	6
4 Data link layer .....	6
5 X2 interface user plane protocol .....	6
5.1 General .....	6
5.2 GTP-U .....	7
5.3 UDP/IP .....	7
5.4 Diffserv code point marking .....	7
5.5 Dual Connectivity .....	7
<b>Annex A (informative): Change history .....</b>	<b>8</b>

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document specifies the standards for user data transport protocols and related signalling protocols to establish user plane transport bearers over the X2 interface.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 29.281: "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)".
- [3] IETF RFC 768 (1980-08): "User Datagram Protocol".
- [4] IETF RFC 2474 (1998-12): "Definition of the Differentiated Services Field (DS Field) in the Ipv4 and Ipv6 Headers".
- [5] IETF RFC 2460 (1998-12): "Internet Protocol, Version 6 (IPv6) Specification".
- [6] IETF RFC 791 (1981-09): "Internet Protocol".
- [7] 3GPP TS 36.401: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Architecture Description".
- [8] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2".
- [9] 3GPP TS 36.425: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 interface user plane protocol".

---

# 3 Definitions, symbols and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following terms and definitions below apply. Terms and definitions not defined below can be found in TR 21.905 [1].

**Dual Connectivity:** Defined in TS 36.300 [8].

**E-RAB:** Defined in TS 36.401 [7].

**X2:** logical interface between two eNBs. Whilst logically representing a point to point link between eNBs, the physical realisation need not be a point to point link.



## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

DC	Dual Connectivity
eNB	E-UTRAN Node B
E-RAB	E-UTRAN Radio Access Bearer
E-UTRAN	Evolved UTRAN
GTP	GPRS Tunnelling Protocol
IP	Internet Protocol
MeNB	Master eNB
PDCP	Packet Data Convergence Protocol
PDU	Protocol Data Unit
SCG	Secondary Cell Group
SeNB	Secondary eNB
TEID	Tunnel Endpoint Identifier
UDP	User Datagram Protocol

---

## 4 Data link layer


Any data link protocol that fulfils the requirements toward the upper layer may be used.

---

## 5 X2 interface user plane protocol

### 5.1 General

The transport layer for data streams over X2 is an IP based Transport. The following figure shows the transport protocol stacks over X2.

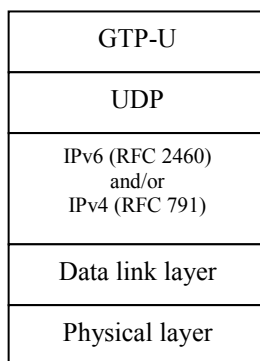

**Figure 6.1: Transport network layer for data streams over X2**

The GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for data streams on the X2 interface. The data link layer is as specified in clause 4.

There may be zero or one UL data stream and zero or one DL data stream per E-RAB at the X2 interface.

- The DL data stream is used for DL data forwarding from the source eNB to the target eNB.
- The UL data stream is used for UL data forwarding from the source eNB to the target eNB.

Each data stream is carried on a dedicated transport bearer.

The identity of a transport bearer signalled in the RNL control plane consists of the IP address and the TEID of the corresponding GTP tunnel, allocated by the target eNB (see TS 29.281 [2]).

## 5.2 GTP-U

The GTP-U (TS 29.281 [2]) protocol shall be used over the X2 interface between two eNBs.

## 5.3 UDP/IP

The path protocol used shall be UDP (IETF RFC 768 [3]).

The UDP port number for GTP-U shall be as defined in TS 29.281 [2].

The eNBs over the X2 interface shall support fragmentation and assembly of GTP packets at the IP layer.

The eNB shall support IPv6 (IETF RFC 2460 [5]) and/or IPv4 (IETF RFC 791 [6]).

There may be one or several IP addresses in the both eNBs. The packet processing function in the source eNB shall send downstream packets of a given E-RAB to the target eNB IP address (received in X2AP) associated to the DL transport bearer of that particular E-RAB. The packet processing function in the source eNB shall send upstream packets of a given E-RAB to the target eNB IP address (received in X2AP) associated to the UL transport bearer of that particular E-RAB.

The Transport Layer Address signalled in X2AP messages is a bit string of either

- a) 32 bits in case of IPv4 address according to IETF RFC 791 [6]; or
- b) 128 bits in case of IPv6 address according to IETF RFC 2460 [5].

## 5.4 Diffserv code point marking

IP Differentiated Services code point marking (IETF RFC 2474 [4]) shall be supported. The mapping between traffic categories and Diffserv code points shall be configurable by O&M for based on QoS Class Identifier (QCI)/ Label Characteristics and others E-UTRAN traffic parameters. Traffic categories are implementation-specific and may be determined from the application parameters.

## 5.5 Dual Connectivity

For the SCG bearer option, user data forwarding may be performed. The behaviour of the eNB from which user data is forwarded is the same as specified for the “source eNB”, the behaviour of the eNB to which user data is forwarded is the same as specified for the “target eNB”.

For the split bearer option

- the GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for the data stream of PDCP PDUs on the X2 interface. The GTP-U PDU includes a RAN Container with flow control information as specified in TS 36.425 [9] which is carried in the GTP-U extension header. The transport bearer is identified by the GTP-U TEID (TS 29.281 [2]) and the IP address of the MeNB and SeNB respectively. There may be zero or one UL data stream and there is one DL data stream per E-RAB at the X2 interface:
  - The DL data stream is used for DL data transmission from the MeNB to the SeNB.
  - The UL data stream is used for UL data transmission from the SeNB to the MeNB.
- the packet processing function in the MeNB shall send downstream packets of a given E-RAB to the SeNB IP address (received in X2AP) associated to the DL transport bearer of that particular E-RAB. The packet processing function in the SeNB shall send upstream packets of a given E-RAB to the MeNB IP address (received in X2AP) associated to the UL transport bearer of that particular E-RAB.
- data forwarding may be performed by MeNB providing GTP-U TEID to receive the DL data forwarded by the SeNB.

## Annex A (informative): Change history

TSG #	TSG Doc.	CR	Rev	Subject/Comment	New
38				approved at TSG-RAN and placed under change control	8.0.0
39	RP-080078	0001	-	Editorial correction on 36.424	8.1.0
39	RP-080078	0002	-	Data link layer proposal	8.1.0
40	RP-080302	0003	1	eGTP draft reference for X2 Data Transport	8.2.0
40	RP-080302	0005	-	Define format for TLA signalled in X2AP messages	8.2.0
41	RP-080583	0006	1	X2 transport bearers	8.3.0
42	RP-080845	0007		Correction of SAE Bearer	8.4.0
43	RP-090083	0008		Correction on GTP-U version	8.5.0
09/2009	-	-	-	Creation of Rel-9 version based on v8.5.0	9.0.0
12/2010				Creation of Rel-10 version based on v. 9.0.0	10.0.0
SP-49	SP-100629			Clarification on the use of References (TS 21.801 CR#0030)	10.0.1
52	RP-110684	0009		Correction of references	10.1.0
09/2012				Update to Rel-11 version (MCC)	11.0.0
63	RP-140297	0011	1	The content of Transport Layer Address	12.0.0
66	RP-142089	0013	6	Data Forwarding and Data transmission	12.1.0
67	RP-150351	0021	1	Correction on Data Transmission over X2	12.2.0