

TR-1058

遠隔地域での ICT ソリューション導入に向けた ハンドブック

Handbook to introduce ICT solutions for the community in rural areas

第5版

2022年3月1日制定

一般社団法人 情報通信技術委員会

THE TELECOMMUNICATION TECHNOLOGY COMMITTEE



本書は、一般社団法人情報通信技術委員会が著作権を保有しています。 内容の一部又は全部を一般社団法人情報通信技術委員会の許諾を得ることなく複製、転載、改変、転用 及びネットワーク上での送信、配布を行うことを禁止します。 <参考>

1. 国際勧告等との関連

本技術レポートに関する国際勧告はない。

2. 改版の履歴

ſ	版数	制定日	改版内容
	第 5.0 版	2022年3月1日	ケーススタディの追加 "e-Healthcare for end epidemic of Tuberculosis in Myanmar"
	第 4.0 版	2020年3月23日	ケーススタディの追加 "Smart City Application"
	第 3.0 版	2018年3月28日	ケーススタディの追加 "e-Aquaculture (2) in Vietnam"
	第 2.0 版	2016年2月16日	ケーススダディの追加 "E-disaster risk management"
	第 1.0 版	2015 年 3 月 10 日	制定

3. 本技術レポートの作成について

TTC は 2007 年に普及推進委員会を設置し、アジア・太平洋電気通信共同体 (Asia-Pacific Telecommunity (APT)) の活動プログラムであるアジア・太平洋電気通信標準化機関 (APT Standardization Program (ASTAP)) に設置さ れた標準格差是正エキスパートグループ (EG BSG) での討議に参加するとともに、アジアのルーラルエリアに おける ICT ニーズや有用性を把握するため、APT パイロットプロジェクトに参画し3 カ国 (インドネシア、マ レーシア、フィリピン)・5 分野で ICT ソリューション実証実験を実施してきた。これらの討議・ケーススタ ディを積み重ねていく中で、ICT ソリューションをアジアのルーラルエリアに広く普及させるためには、他地 域にも展開可能となるようルーラルエリア共通の要求条件や導入ガイドライン等を「ソリューション利用標準」 として標準化し普及させる必要性があることを強く認識した。

本技術レポートは、これらの活動を通じて得られた知見をもとにして作成されたものである。

なお、2021 年 6 月に開催された ASTAP-33 に、本技術レポートをもとに "Handbook to Introduce ICT Solutions for the Community in Rural Areas" の改訂を提案した。この文書はレポートとして承認 (APT/ASTAP/REPT-13(Rev.4)) され、APT ホームページより参照可能である。

4. 執筆者

本文書はBSG 専門委員会委員および実証実験プロジェクトを共に遂行した SHARE ミーティングメンバーが執筆した。

※SHARE ミーティング: "Success & Happiness by Activating Regional Economy" Meeting
 BSG 専門委員会が主催する、ASEAN 各国(インドネシア、フィリピン、マレーシア、タイ、ベトナム)
 通信主管庁・大学関係者等との連絡会組織
 各国にて農業・水産業・教育・医療・環境等に関する ICT
 ソリューション導入パイロットプロジェクト等を実施

5. 工業所有権

TTCの「工業所有権等の実施の権利に係る確認書」の提出状況は、TTCホームページで公開されている。

6. 標準策定部門

標準格差解消(BSG)専門委員会

HANDBOOK TO INTRODUCE ICT SOLUTIONS FOR THE COMMUNITY IN RURAL AREAS Revision 4

CONTENTS

	Page
1. Ov	verview of the Handbook1
1.1 l	ntroduction1
1.2 0	Generic Model of SHARE Pilot Projects
2. Ca	se Study of Solutions
2.1	Aquaculture Solution in the Philippines
2.1.	1 Background of the Project
2.1.	2 Objectives
2.1.	3 Project Site
2.1.	4 Partner Organization
2.1.	,
2.1.	
2.1.	7 Conclusion (Future Prospects)
2.2 e	e-Education Solution in Malaysia9
2.2.	
2.2.	= -j
2.2.	- · J · · · · · · · · · · · · · · · · ·
2.2.	
2.2.	- $ -$
2.2.	
2.2.	
2.2.	8 Conclusion16
2.3 e	e-Environment Solution in Indonesia17
2.3.	1 Background of the Project
2.3.	J
2.3.	3 Project Site
2.3.	4 Partner Organization
2.3.	5 System Configuration
2.3.	6 Outline of the Solution
2.3.	7 Benefits of Introduction
2.3.	8 Future Prospects
2.4 e	-Healthcare Solution in Indonesia
2.4.	1 Background of the Project
2.4.	
2.4.	
2.4.	5
2.4.	-
2.4.	5 8
2.4.	
2.4.	
	e-Disaster Risk Management in Philippines
2.5.	
2.5.	2 Objectives

2.5.3	Project Site	34
2.5.4	Partner Organization	34
2.5.5	System Configuration	35
2.5.7	Benefits of Introduction	36
2.5.8	Conclusion (Future Prospects)	37
2.6 Shr	imp Water Quality Monitoring in Vietnam	38
2.6.1	Background of the Project	38
2.6.2	Objectives	
2.6.3	Project Site	38
2.6.4	Partner Organization	38
2.6.5	System Configuration	
2.6.7	Benefits of Introduction	
2.6.8	Conclusion (Future Prospects)	44
2.7 Sm	art City Application Case Study in Asia-Pacific Region	45
2.7.1	Background of the Project	45
2.7.2	Objectives and Scope	
2.7.3	Project Site	46
2.7.4	Partner Organization	
2.7.5	Guidance of Implementation and Operation	
2.7.6	Benefits of this Project	
2.7.7	Conclusion	
2.8 ICT	f utilization for end epidemic of Tuberculosis in Myanmar	54
2.8.1	Background of the Project	54
2.8.2	Objective	
2.8.3	Project Site	58
2.8.4	Partner Organization	
2.8.5	System Configuration	
2.8.6	Benefits of Introduction	
2.8.7	Conclusion	70
3. Sum	nary of ICT Solutions	71

1. Overview of the Handbook

This handbook summarises a selected list of projects which were conducted through the provisions of APT J2 and J3 programmes. The APT J2 programme is titled "HRD Programme for Exchange of ICT Researchers/Engineers through Collaborative Research" and APT J3 programme is titled "ICT Development Programme for Supporting ICT Pilot Projects in Rural Areas".

The goal of these projects is focused on strategies to demonstrate how rural needs can be addressed by deploying state-of-the-art ICT solutions. The proponents from every country proposed to address specific areas in their country for rural deployment. In these projects e-Aquaculture, e-Education, e-Environment and e-Healthcare were proposed in the Philippines, Malaysia, Indonesia; with support and assistance from local project leaders, and through regular consultations and collaborative meetings, the other team members and Japanese collaborators shared in the development and deployment of each project work. There has been instances in which innovations in one country flowed quickly to another team in another country. An important feature of these SHARE projects has been the development of a strong local build to the programmes. To meet the goal, it necessitated careful site selection for each project to ensure long term reliability and local co-ownership of the projects. To achieve the collaborative goal within a short period designated for each project, every team leader thrived on already existing relationships with local governments or relevant organizations. In this way the local people became co-innovators in the SHARE project.

Each project was carried out in one country; however every solution and constructed network system is applicable and useful to other member countries as well. The sharing of inforamtion about experiences with local communities in each country is invaluable; it has helped shape the strategies to engage and to deploy solutions that aligned with the SHARE goals. In the handbook four projects are presented as case studies of solutions. Each project begins with an introduction to the local sites, analysis of problems, decision processes for the design of solutions, system configurations and a conclusive description about the outcome of each project.

1.1 Introduction

The Telecommunication Technology Committee (TTC) Promotion Committee began its activities in April 2007. Its philosophy was based on the slogan "Let's SHARE -Success & Happiness by Activating Regional Economy- together." Through cooperation among five countries in Asia (Indonesia, Malaysia, Philippines, Thailand and Vietnam), and with the support of the Asia-Pacific Telecommunity (APT), TTC has been conducting ICT pilot projects in rural areas, with solutions for social issues in Agriculture, Aquaculture, Environment, Health, Education and constructing Telecommunications infrastructure.

In the 14th meeting in June 2008, a Case Study Team (CST) was established in 2008, under the standardization gap, from the point of how to use the latest ICT for improving people's lives and bringing more happiness in developing countries and how to implement latest technologies, systems and services at affordable cost toward that goal. These goals were realized through the development of various case studies enabled by APT funding, which were implemented in each country. The solutions created and deployed were extended to neighboring Asia countries upon completion.

In sum, SHARE members and CST were able to apply latest standardized technologies and systems to various applications and services through the collaborative experience in designing and developing innovative solution-based projects supported by APT's J2 and J3 programmes.

SHARE members have selected the following five applications over ICT to be developed as the solutions for social issues in rural areas.

- e-Agriculture and Aquaculture
- e-Education

- e-Environment
- e-Healthcare
- e-Disaster Risk Management

Details about each solution are presented in the following sections.

1.2 Generic Model of SHARE Pilot Projects

Figure 1-1. shows the generic model for pilot projects demonstrated in rural areas of South-East Asia. The model centres on the building of sensor networks, to gather data which are measured by various sensors on a file server, and the processed data are sent to specialists in urban areas through the network. Specialists would then be able to analyse the data, and provide prompt feedback through the network, to enable efficient resolutions to issues faced on location.

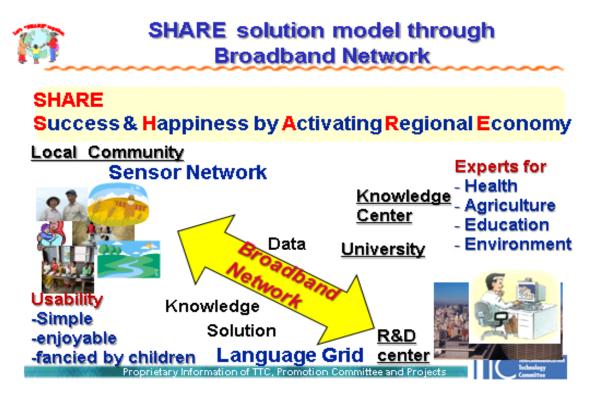


Figure1-1: SHARE solution model through Broadband Network

2. Case Study of Solutions

2.1 Aquaculture Solution in the Philippines

-APT J2 in the Philippines:	"A Broadband Farm to Market Ecosystem for Fisher folk Communities"
-APT J3 in the Philippines:	"Broadband Farm to Market Ecosystem for Fisher folk Communities"

The APT J3 project in the Philippines is the continuation of a previous study funded under the APT J2 Programme, which was conducted in CY 2009 to explore the technologies and protocol as needed with a view to designing the implementation (on a pilot scale) of an open access broadband farm to market ecosystem. The Project "A Broadband Farm to Market Ecosystem for Fisher folk Communities" cover activities leading to the pilot deployment and development of a network of sensors, field servers, ICT telecenters and knowledge management systems aimed at enabling a fully functioning research, social, economic and education ecosystem centered around the tilapia raising industry of a well-organized community of fisher folks in the Seven Lakes of San Pablo City, Laguna, Philippines.

2.1.1 Background of the Project

Aquaculture production in the Philippines rapidly grew in the last fifty years (Figure 2-1-1). It is important to note that Aquaculture production has increased twice of marine production (Fig. 2-1-2) and consequently requires strong support to expand further. At the project site, the seven lakes of San Pablo City Laguna, Philippines, has been diagnosed to have a lack of oxygen supply, leading to sudden killing of many fish. The project aims to reduce fish kill thathas been caused by oxygen deficiency in the lake since 2010, by monitoring water quality. The solution was to monitor the dissolved oxygen, conductivity, turbidity, and temperature of the water.


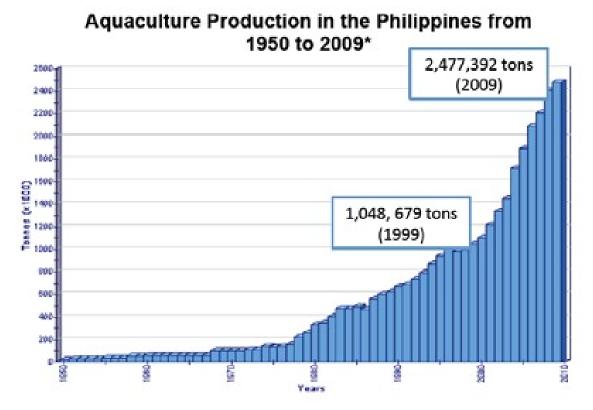


Figure 2-1-1: Aquaculture Production in the Philippine from 1950 to 2009

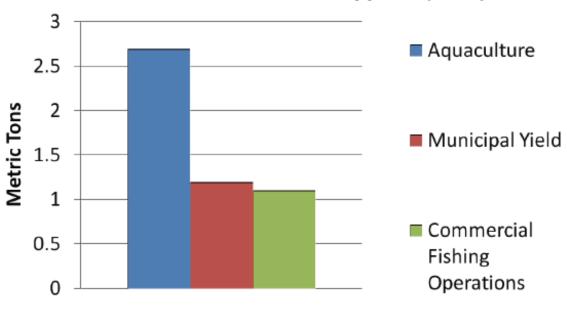

Marine Production in the Philippines (2010)*

Figure 2-1-2: Marine Production in the Philippine 2010

2.1.2 Objectives

The fish kill problem is one of the biggest problems for fishing communities in the Philippines. Fish kills often happen when there is insufficient dissolved oxygen. Fully polluted water decreases gas absorption in water. Another cause for fish kill is over-feeding, which leads to increased biological demand for oxygen. At the project location, there also exists an issue about the multiple management of the lake resources, which caused misalignment in strategies to upkeep the fishing industry efficiently. The main aim of the project is to reduce fish kill that is caused by oxygen deficiency in the lake. The project constructed a sensor network that measured and monitored the dissolved oxygen level, temperature and transparency of the water. Furthermore it also builds a knowledge database that contributes to market growth and training the young fisher folks. In sum, the data can be viewed on a website in almost real time, enabling lake management best practice.

2.1.3 Project Site

Lake Palacpakin, located 14°06'771"N and 121° 20'194'E in the city of San Pablo, Laguna is the second largest lake among the Seven Crater Lakes. It has a total surface area of 43 hectares and a maximum depth of 7.5 meters (MSC Technologies Inc., 1998b). It is bordered by the three barangays of San Buenaventura, San Lorenzo and Dolores. The inlet of the lake brings water in from Lake Calibato through the Prinsa River (Figure 2-1-3). Aside from rainfall, this river system is the only source of water for the lake. Water from the lake goes out into a connecting river, and eventually drains into the Laguna Lake.



Figure 2-1-3: Map of seven lakes area

Four sites were sampled, specifically;

Site 1 is at the inlet where water comes into the Palacpaquen from Lake Calibato; Site 2 is at the pool beside the inlet, where there is relatively calm water; Site 3 is on the periphery of the lake in between the inlet and outlet, and Site 4 is at the lake outlet under the bridge.

2.1.4 Partner Organization

·Ateneo De Manila University, Philippines

- Department of Transportation And Communication, Philippines
- ·Congressional Committee On Science Technology And Education (COMSTE), Philippines
- •The Telecommunications Technology Committee (TTC), Japan
- •NTT-West, Japan
- ·Kasetsaart University & NECTEC, Thailand
- •Tokyo University, Japan
- •National Agricultural Research Office (NARO), Japan

·Agriculture Land Reform Office (ALRO), Thailand

2.1.5 System Configuration

This project designed, built and constructed a sensor network that measured and monitored the dissolved oxygen level, temperature and transparency of the water. Eventually, once internet connection is established in the deployment site, the floating field server would be stationed anywhere in the lake to monitor the different lake parameters. Figure 2-1-4 illustrates the network diagram of the field servers at Palakpakin Lake as the pilot deployment site. As part of the lake monitoring, an unmanned aerial vehicle equipped with camera were also deployed for map stitching and surveying to make sure that the carrying capacity of the lake was maintained.

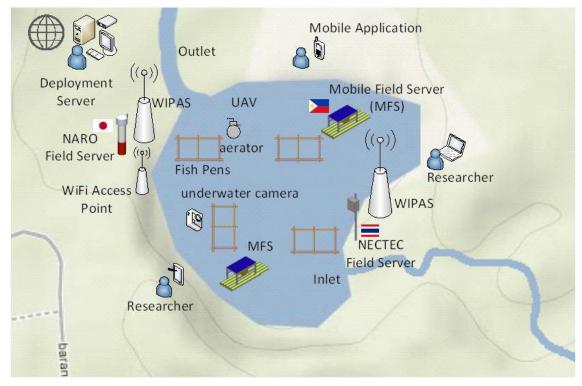


Figure 2-1-4: System configuration in Palapakin lake


The research team used each country's field server, specifically from Thailand and Japan. The Philippine's mobile floating field server was able to capture data about Dissolved Oxygen, conductivity, water temperature under 0.5 and 2.5 m and using GPS location. The Japanese Field Server was able to measure Dissolved Oxygen, pH, air temperature, humidity,-Built in IP camera. The Thai's Field Server-Measures was able to measure Dissolved Oxygen, pH, and humidity (Figure 2-1-5).





Figure 2-1-5: Field Server each country

Furthermore it also builds on a knowledge database that contributes to market growth and training the young fisher fork. In the information system the field server data are all displayed and often data (like pictures taken from the lake) can be added. Through the approach, the research team is able to demonstrate a lake management system.

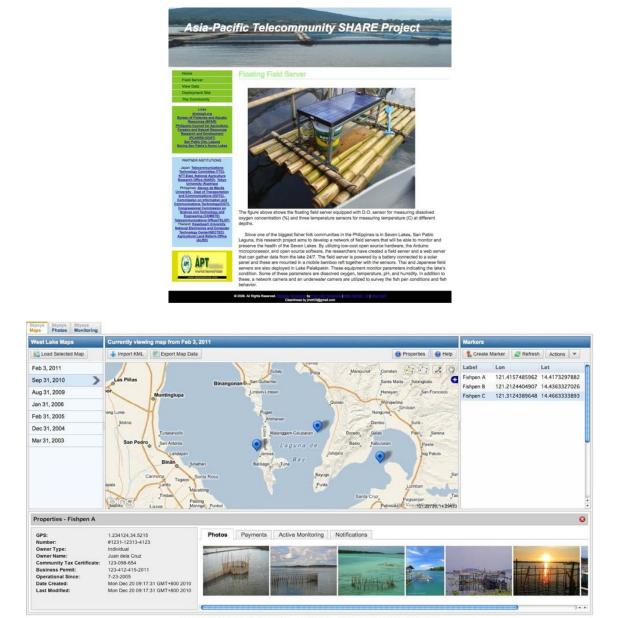

011 MySkyeye, Skyeye, Inc. All rights reserved. | Feedback | Support | Privacy Policy | Terms of Use

Figure 2-1-6: An information and knowledge base was developed from field servers data

2.1.6 Benefits of Introduction

Figure 2-1-7 shows a fishpond worker removing dead milkfish locally known as Bangus after thousands of them were found floating on Taal Lake in Batangas province, south of Manila, Philippines, recorded onSunday May 29th,2011. Losses from fishkill in northern Philippines are tremendous. Over 800 tonnes of fish die, and these losses from fish kill are estimated to be valued at P150 million. Our project is expected to help to stabilise aquaculture production and income for fisher folk through the Philippines, once standardized sensor systems are developed with full telemetry web information.



Figure 2-1-7: 800ton fish die in Taal Lake

2.1.7 Conclusion (Future Prospects)

A first cut network design has been completed. The sensor suite should include data on dissolved oxygen, conductivity, turbidity and temperature. First cut sub-system prototypes, the purpose of which would be to clarify design and implementation issues needed to be successfully deployed in such a system for the J3 Project Phase. After the project, AIC (Ateneo Innovation Center) continued the development of a newly developed system which has expanded the sensor system to include an aerator that pumps oxygen into the fish ponds, when they see the oxygen levels being really low, turn on aerator system by simply texting the field server. All data appears on a website updated every 30 minutes.

2.2 e-Education Solution in Malaysia

-APT J2 in Malaysia: "Bridging the digital divide in Remote rural areas: a universal Playground for children"
-APT J3 in Malaysia : "Technology enhanced solutions for Remote rural communities in Malaysia to facilitate Development of Learning and Preservation of local knowledge and create health awareness and practice for healthy living"

2.2.1 Background of the Project

Bario is a remote rural location on the island of Borneo, close to the Malaysia-Indonesia border between Sarawak, Malaysia and Kalimantan, Indonesia. There are twelve longhouses in Bario which are homes to about 1,000 people. While there are many locations in Sarawak that can be categorized as remote rural, Bario was selected because of its isolated geographical location.

Before the Universiti Malaysia Sarawak's project commenced in 1999, Bario did not have 24-hour electricity supply and water was available only through gravity-fed systems. There was also no sophisticated telecommunication service available, and communication was largely conducted using radio calls, as well as by passing messages to departing passengers, and getting messages from passengers arriving at the local airport.

In April 1999, UNIMAS started the e-Bario project with the general aim of bridging the digital divide between urban and rural communities. In order to achieve this, baseline data describing the technological needs and readiness of the Bario's community was obtained, and this was soon followed by the introduction of ICT to the community. The technologies deployed were VSAT (telecommunication system) which allowed the Internet connectivity to the Bario telecenter. Power is supplied by photo-voltaics (solar system) with computers there. Facilitated by UNIMAS e-Bario researchers, the people of Bario began connecting with the rest of the world using ICT, and this marked the first phase of the project implementation.

2.2.2 Objectives

This project proposed to implement a multifaceted approach to provide efficient technology-enhanced solutions for remote rural communities in Sarawak, Malaysia. Specifically, the objectives of the project are to establish a optical LAN infrastructure for two schools and a health clinic in Bario; to develop e-Education solution which serves as digital learning repository to complement formal teaching and learning experiences of the school community in Bario, Ba'kelalan, Long Lamai and Larapan Island; and to propose a sustainable health check system for use by community members in these identified remote rural communities in Sabah and Sarawak.

The optical LAN infrastructure is an important linkage that will enable the other two solutions (i.e. e-Education and e-Health) to be developed in these remote rural areas. The e-Education solution aims to design and develop a digital learning repository in five areas of interest: health sciences, ICT, communication, living skills, and indigenous knowledge and culture. The e-Health check system is to be introduced to children and young adults in the community, to raise awareness about regular health checks which need to be performed periodically to detect and monitor common illnesses.

Overall, the objectives of the project state that:

- Implement a multifaceted approach to provide efficient technology-enhanced solutions for remote rural communities in Sarawak, Malaysia
- Establish optical LAN infrastructure for schools and health clinic in Bario to enable

Develop an e-Education solution which serves as digital learning repository to complement formal teaching and learning experiences of the school community in Bario, Ba'kelalan, and Long Lamai in

Sarawak and Larapan Island, Sabah

Develop an e-Health solution to provide a sustainable health check system for use by community members in these identified remote rural communities in Sarawak and Sabah.

Document the impact of e-Education and e-Health solutions on educational experiences and health awareness of the community members in these remote rural locations

2.2.3 Project Site

The project is mainly conducted at Universiti Malaysia Sarawak (UNIMAS) campus in Kota Samarahan, and Bario, the Kelabit Highlands. Figure 2-2-1 is a map of Sarawak indicating the locations of both venues



Figure 2-2-1: Location of Bario and Kuching on the Borneo map

Bario is a remote rural location on the island of Borneo, close to the Malaysia-Indonesia border between Sarawak, Malaysia and Kalimantan, Indonesia. The only practical way to get to Bario is a one-hour flight on a 19-seater Twin Otter airplane from Miri, Sarawak. At present, there are no gravel roads leading into Bario, and a land journey requires a river journey and a 14-day-long trek across forested mountains.

The majority of the people in Bario are Kelabits, one of the smallest ethnic groups in Sarawak. They are generally farmers, growing the famous organic, fragrant Bario rice, and the sweet highland pineapples. While there are many locations in Sarawak that can be categorised as remote rural, Bario was selected because of its isolated geographical location.

The Bario children go to the Bario Primary School which provides education from Primary 1 to Primary 6 or age 7-12. Bario Secondary School provides education from Form 1 to Form 3 (ages 13-15) only. When students finish school in Bario, they have a choice to either go to two nearby towns, Miri or Marudi, to continue their studies. Most students attending the primary and secondary schools in Bario stay at the school dormitories because their own homes are miles away from the location of the schools. Today, the schools have received a growing number of Penan (who practice nomadic values and way of living) and Sabans (who migrated from another remote rural area for socio-

economic needs), and both of these ethnic groups are of minority ethnic in Sarawak, living within close proximity to the Bario Highlands.

2.2.4 Partner Organization


- Universiti Malaysia Sarawak (UNIMAS), Malaysia
- The Telecommunication Technology Committee (TTC), Japan
- NPO Pangaea, Japan
- Japan Advanced Institute of Science Technology (JAIST), Japan
- Nippon Telegraph And Telephone Corporation (NTT), Japan
- Mitsubishi Electric Corporation, Japan

2.2.5 System Configuration

2.2.5.1 Fibre Optic Network

Figure 2-2-2 shows the schematic view of optical fiber network in Bario. We installed optical fiber from telecenter (eBario) to primary and secondary school and from telecenter to New hospital and current clinic.

One fiber count optical drop cable was used for aerial and one fiber count indoor optical fiber cable with SC connector was used for indoor. The existing poles once built for an abandoned hydropower supply plan were utilized to lay on optical fibers, Optical splitter is located at the pole between primary and secondary school and the pole between new hospital and current clinic, respectively. Total fiber length is about 2.5 km from eBario to secondary school, about 2.3 km from eBario to primary school, about 500m from eBario to a new community clinic, and about 200m eBario to the existing clinic, respectively.

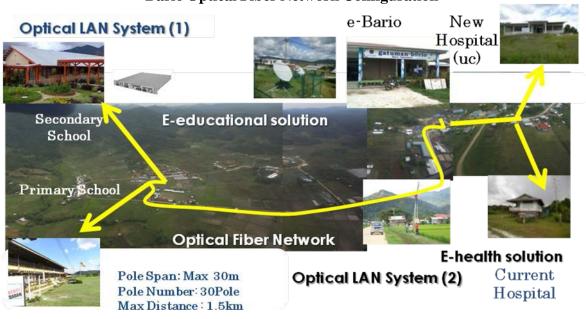

Bario Optical Fiber Network Configuration


Figure 2-2-2: Optical LAN System

2.2.5.2 Optical Network System

Figure 2-2-3 shows the GE-PON network for APT J3 Malaysia Project at Bario. The GE-PON network is constructed over the optical fibers laid by Commuture in October, 2011. As shown in the figure, the GE-PON network consists of the following two PON lines:

Line A from TeleCenter to the Primary School and the Secondary School, and Line B from TeleCenter to the Current Clinic and the New Hospital.

Both Line A and Line B are terminated at the local telecenter by the OLT (Optical Line Terminal). The OLT relays packets over Line A or Line B to a server or a router via a L2 switch. The other ends of Line A and Line B are terminated by ONUs. An ONU has a LAN port to accommodate a PC, an L2 switch, or a WiFi BTS.

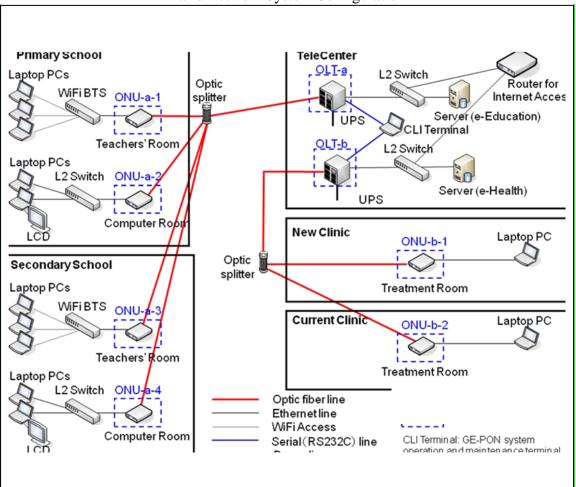

Bario Network System Configuration

Figure 2-2-3: Bario Network System Configuration

2.2.5.3 WiFi Implementation

At the ONU termination in the two schools, the network connection was further extended to the common student activity areas via WiFi access point. The tablets required WiFi connection to the network as that is the only means to connect. WiFi access point allowed multiple tablets to connect to the GE-PON network concurrently. The WiFi access points deployedwere compliant to the IEEE802.11n standard for supporting maximum data rate to take advantage of the higher performance GE-PON system installed. The WiFi coverage was within 50 meters from the WiFi access point.

2.2.5.4 Server Implementation

There was a total of four servers being deployed in the e-Bario telecentre for various applications provision over the GE-PON network. The application servers are as follow.

- a) e-Health Database Server
- b) Viscuit Application server
- c) Education Moodle Server
- d) Backup Server for e-Health Database

Among the deployed servers, the e-Health Database server is a standard desktop computer comes complete with a monitor display, keyboard and mouse. The server is running on Ubuntu platform.

The Viscuit Application server is a notebook computer that hosts all the proprietary Viscuit application services. Viscuit enables users who is not familiar with computers to create graphical animation by utilizing drawing tools. The advantage of using Viscuit is to teach users the fundamental concepts of basic programming.

The E-Education server runs on a Windows platform. The server hardware utilizes the green computing concept or known as green server in that it is able to utilize energy, either from the telecentre, or from its own dedicated solar panel and battery system. The green server is a highly power optimized computer system built from Intel Atom processors and other power optimized system components such as solid state drive etc. Its power supply system is designed for native solar power input to take advantage of minimizing the power conversion loss throughout. The power of Green Computing System is supplied through a customized portable solar charging system with battery that can be installed almost instantly anywhere due to is small in size (battery and controller box dimension is around $10" \times 12" \times 7"$ and solar panel size is around 4' x 2.5').

The backup server for e-Health solution is a replica of the e-Health database server where its hardware is similar to that used by the E-Education server, which adopts the Green Computing System.

2.2.5.5 Solar Power Implementation

A separate solar power system was designed and deployed as additional electrical power input for the e-Bario telecentre. Figure 2-2-4 shows the solar panel, which is installed on the telecentre's rooftop. The size of this solar power system is 1.3kW. The main purpose of the system is to provide power specifically for the network equipment such as the GE-PON, switches, routers and servers deployed for the project. This solar power system is separated from the main telecentre solar power system in order to prevent single point power outage in the telecentre that maycause power blackouts to the critical network equipment. Hence, connectivity reliability can be further improved.



Figure 2-2-4: Solar panel installation on bario telecentre's rooftop

2.2.6 Outline of the Solution

2.2.6.1 e-Education system

There are several outputs identified for this aspect of the Digital Learning Repository (DLR). These are the features available on the E-Education system:

- a) Creating an Android application which will be the primary input tool for the children to capture data and content
- b) Creating a customized access and interface to an open source Learning Management system, which will be used to assemble and further develop the data and content captured by the children
- c) Creating a user-friendly localized version of Viscuit, an open source application for children which teaches them to learn about basic computer programming using drawing tools

To best understand the process of data collection and processing between users and stakeholders in the project, an illustration of the scope of work for this project is presented in Figure 2-2-5.

PROCESS OF DATA COLLECTION

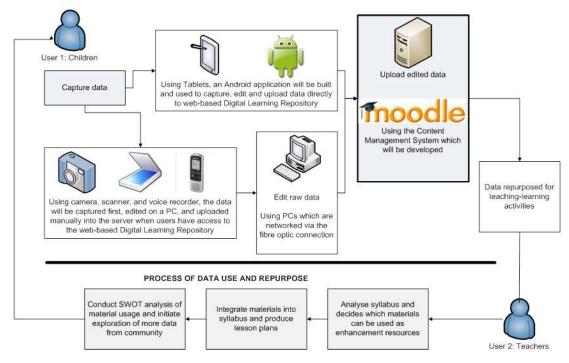


Figure 2-2-5: Process of Data collection

2.2.6.2 e-Health Check system

The e-Health check system for this project is designed to record basic health data (height, weight and blood pressure) of the local population. The system is developed by researchers in JAIST, and it was introduced to children and young adults in the community to raise awareness about regular health checks which need to be performed periodically to detect and monitor common illnesses.

During the installation of the system, community members from a village called Ulong Padang in Bario learned how to use all the health equipments packaged in the E-Health Check system. They were also taught how to create a health check database, which records individual weight, height and blood pressure measurements of people in the local community. Using the fiber optic network, the data collected from users could be transmitted to the local health clinic, and the medical officers could be alerted if there was any anomaly in the data. With a systematic database of information available, dissemination of important health information and interventions can be deployed in a more strategic and sustainable manner.

2.2.7 Benefits of Introduction

2.2.7.1 e-Education

The project enabled the children of a remote rural community in Bario to utilise technology to preserve elements of their culture, language, traditional songs, local myths and living legends into a digital form. The children are able to complement what they learn in school by adding on knowledge from their own local values and culture. The fibre network connection connected the children from their schools to the local telecentre, which opened new ways for them to connect with the rest of the world.

Their teachers at the schools also benefited from the availability of the mobile tools and applications and internet connection as well, because they are now able to use digital resources to strengthen the contents of their lessons. With the children's activities using the mobile technology tools, the teachers are also able to tap into the children's digital products and integrate the contents with topics they teach in the classroom.

Children and teachers in Bario are encouraged to use the mobile tools as much as possible, and they are not confined to only activities designed for the programme, in order to maximise the potential of mobile learning for learning and teaching.

2.2.7.2 e-Health

The introduction of E-Health Check system which includes patient monitoring system, intends to promote health awareness among the communities in Bario. Since the elderly make up the majority of the local population, plus the lack of professional health personnel on a permanent basis in Bario, health monitoring is a key concern for Bario residents.

The Health Check system was designed by researchers in Japan, and it was deployed earlier at Tanah Datar province in West Sumatera, Indonesia. The same set was introduced in Bario, to enable the local community to conduct and manage their own health checks at their convenience. The Bario community has one health clinic established at the heart of Bario, and medical officers are flown in every two weeks to conduct physical checks on those in need.

With the introduction of the E-Health Check System, the community was excited to know about their health status. They were pleased that they were able to conduct their own checks, and data from the checks were transmitted to the Health Check database located at the local clinic. It enabled a systematic record of health checks, making it easier for medical officers to obtain records about the health of people in Bario.

2.2.8 Conclusion

This pilot project was the first trial to introduce fiber optic network into rural areas in ASEAN countries and indicated its effectiveness. The research team continues to learn and to seek solutions using ICT to help extend the indigenous knowledge and culture of these communities to enable them to prosper and improve their lives and well-being even when living in remote rural locations. The focus remains on developing the ICT literacy skills and knowledge of children in remote rural areas, because these children are the hopes of their unique communities to propel their social, economic , cultural and intellectual developments into the future.

2.3 e-Environment Solution in Indonesia

-APT J2	in Indonesia:	"Exploration of ICT's Potential in Peatland Environmental
		Conservation to Address Climate Change "

-APT J3 in Indonesia: "Promotion of e-environmental community with ICT solution in Central Kalimantan, Indonesia"

2.3.1 Background of the Project

In the later half of 1990's the development of peatland in Central Kalimantan, Indonesian Government planned and executed Mega Rice Project (MRP) as a measure in tackling poverty issue. However, it caused environmental destruction of peatland that entailed the social issue of the restoration and conservation of peatland.

Failure of the MRP was caused by unrealistic dimensions of channels, ignoring local knowledge and culture, and it has consequently affected peatland to become very dry in dry season and very susceptible to peat fire, which subsequently produced a large amount of CO2 every year. Thus, deforestation and the degradation of peatland have been the main causes for Indonesia being one of the world's largest emitter of greenhouse gases. Air pollution by peat fire smoke has been threatened human health of neighboring countries.

As the counter-measure to restore the peatland, University of Palangka Raya, through the Center for International Cooperation in Sustainable Management of Tropical Peatland (CIMTROP), has been working for the restoration of the peatland around the university premises for more than 15 years. One of its main activities is to construct the simplified dams on the canals to maintain the water level of the peat land to avoid peat fire from occurring.

However, researchers must personally attain access to the dam sites for observation and information or data gathering, whilst the sites are rigorously challenging to gain access to, and the effort is time consuming.

Thus, it is considered essential to establish a remote monitoring system using ICT technologies, which will make the process of the operations quicker, more efficient, and a set of data series could be recorded.

2.3.2 Objectives

To establish a remote monitoring system for dams and the peatland using ICT technologies, CIMTROP, KOMINFO (Ministry of Communication and Information Technology), and TTC performed APT J2 project APT J3 project.

The projects aims:

- 1) To conduct a feasibility study towards the establishment of the ICT remote monitoring system at rural area. The ICT remote monitoring system is to monitor a simplified dam and peatland so that the researchers can see the visual image of the dam and get the information of the water level remotely at the new data center where the research team of University of Palangka Raya has the facilities for his activities.
- 2) To encourage young researchers to become familiar with the remote monitoring system and also to enhance and improve their understanding, knowledge, and skills about ICT technologies
- 3) To integrate soil sensors at a new monitoring point and to make a test of a new firefighting agent that is expected to act as a preventive measure as well as a counter measure for peat fire.
- 4) To establish a telecenter where the students and residents will be educated on knowledge about

ICT, for instance, the various uses of the Internet and the use of technology for environmental conservation.

5) To share the data collected from the system with joint researchers in the Asian countries.

2.3.3 Project Site



Figure 2-3-1: Location of the Project in Perspective to Larger Indonesian Map

The basic operation of this project is conducted at the site of University of Palangka Raya, in close proximity to Palangka Raya city, the capital city of Central Kalimantan Province, as shown in Figure 1. It takes around 1.5 hours by plane from Jakarta to Palangka Raya. Based on 2010 population census, the population of the municipality stood at 220,223.

As shown in Figure 2-3-2, the project site is located between the two big rivers; Kahayan River and Sabangau River, and canals that were made to drain the water to those rivers from the peatlands that were designated to be developed into rice field as stated on Mega Rice Project objective. Therefore, the peat became dry and consequently it became susceptible to fire.



2.3.4 Partner Organization

·University of Palangka Raya (UNPAR)

- •A center for international research collaboration for tropical peatland (CIMTROP).
- •Ministry of Communication and Information Technology (KOMINFO)
- •The University of Kitakyushu, Japan
- •The Telecommunication Technology Committee (TTC), Japan
- •Nippon Telegraph and Telephone Corporation (NTT), Japan

•NEC Corporation, Japan

2.3.5 System Configuration

The ICT Network configuration is shown in Figure 2-3-3. In the 2010 APT-J2 project, one Data Center and three monitoring points, A, B, and C have been constructed. The Data Center was established specifically with a data server to compile the data sent from the towers. Four 25m Towers were erected, one at the Data Center and three at the designated measuring point A, B and C to establish radio link.

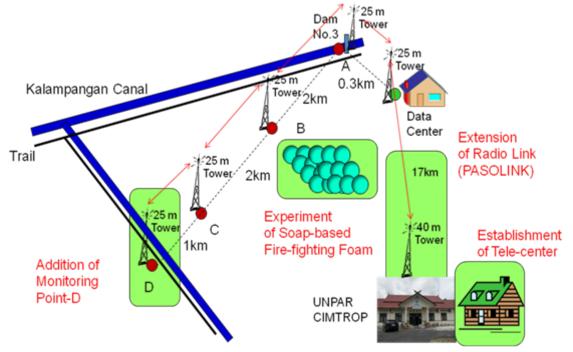


Figure 2-3-3. Network Configuration of Remote Monitoring System

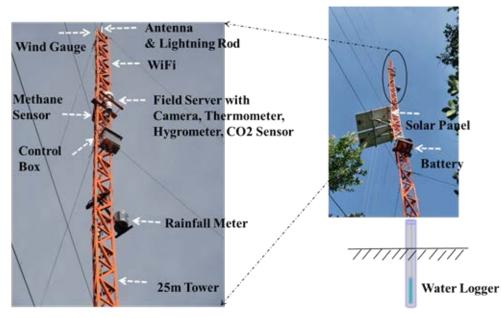


Figure 2-3-4: Tower at Measuring Point A,B and C

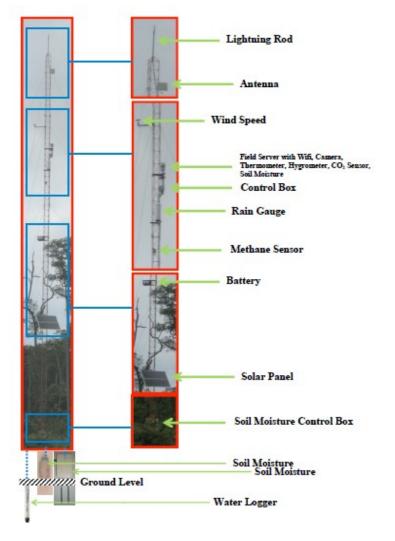


Figure 2-3-5 Tower at Measuring Point D

The equipment was mounted on each tower which consists of a water level sensor in the water, a field server, solar panels with battery, and WiFi equipment for radio system.

The field server is also equipped with WiFi interface and also consists of a thermometer, a hygrometer, a rain gauge, an anemometer, a CO2 sensor, a methane sensor.

In 2011APT-J3 project, Point D was newly provided, which lies on the extension of the straight line from Point A to C and is located in the natural forest near Taruna Canal. In order to evaluate the effect of the fire-fighting foam, the soil sensors were installed at Point D.

A high speed data link, which is called PASOLINK system, was installed to connect the Data Center and CIMTROP office, so that all the collected data at Data Center are transmitted to the data server in CIMTROP office.

The list of the equipment and materials provided in this system is shown in Table 1.

No.	Item	Quantity
1. Field	l Server	
1.01	Field Server	4
1.02	Thermometer	4
1.03	Hygrometer	4
1.04	Rain Gauge	4
1.05	Anemometer	4
1.06	CO ₂ Sensor	4
1.07	Methane Sensor	4
1.08	Solar Panel	4
1.09	Battery	4
1.10	Battery Charging Controller	4
1.11	WiFi Equipment	5
1.12	Software to Display the Collected Data	1
1.13	Accessories	1 lot
2. Hyd	rograph	
2.01	Water Level Sensor	4
2.02	Connecting Cable	4
2.03	RS232C-USB Conversion Cable & Software CD	1
3. Data	a Logger	
3.01	Data Logger	2
3.02	Soil Moisture Sensor	2
3.03	USB Adapter Cable	2
3.04	ECH2O Software CD	2
4. Data	a Server	
4.01	Laptop	2
5. 25 m	n Tower	
5.01	25 m Tower	4
5.02	40 m Tower	1
	•	
6. Soil	Sensors	
6.01	Thermocouple Thermometer	3
6.02	Exchanger	3
6.03	Transmitter	3
6.04	50 m cable	2
6.05	Soil Moisture Sensor	3
6.06	25 m cable	4
6.07	5 m cable	3
6.08	Basic Logger	1
6.09	TDR Soil Moisture Sensor	1
6.10	Logger Net-software	1
6.11	Case	1
6.12	USB-RS232C Exchange Cable	1
6.13	Accessories	1
	Nozzle for Fire Hose	1

Table 2-3-1: Equipment and Materials List

6.15	Computer for Data Analysis	1
6.16	Magnetic Stirrer	1
6.17	Ultracold Freezer	1
6.18	pH Electrode	1
7. PAS	SOLINK Subsystem	
7.01	Indoor Unit	2
7.02	Antenna High Performance Single Pole	2
7.03	ODU-IDU IF Cable	2
7.04	Rectifier Unit	2
7.05	Installation Materials	1
8. Dat	a Server & Software for Telecenter	
8.01	Desktop PC as Data Server	1
8.02	Desktop PC as Data Server for Telecenter	1
8.03	Desktop for Telecenter	1
8.04	Contents Development, Equipment, and Consultation	1

2.3.6 Outline of the Solution

- a) Through the APT J2 project and J3 project, a remote monitoring system that gets data from all measuring points without having to access the actual site was developed. The following components were completed in the J2 project.
 - A new Data Center Building
 - Five units of painted towers (25 m) with fence at the Data Center, with four measurement points at Point A, B, C, and D
 - Four data loggers for water level measurements at Point A, B, C, and D
 - The sensors for the measurement of temperature, humidity, wind speed, rainfall, methane amount, and CO₂ amount at Point A, B, C, and D
 - Video camera at Point A, B C, and D; wireless equipment at each tower
- b) The following components were monitored at each point and transmitted through WiFi radio link to the data server installed at the Data Center.
 - Water level of the canal (at Point A) and of the peatland (at Point B, C and D)
 - Rainfall, external temperature, humidity, wind speed, and CO₂ and methane amounts
 - Soil temperature and water content (at Point D)

Time	CH1	CH2	CH3	CH4	CH5	CH6	CH7
	Temp.	Humidity	Wind Speed	CH4	CO2	Rainfall	Water Level
	(• <i>C</i>)	(RH%)	(m /s)	(ppm)	(ppm)	(<i>mm</i>)	(<i>mm</i>)
28/12/2012 6:44	30.31	22.05	3.29	0.54	998.9	1215	167.58
28/12/2012 7:43	29.49	20.37	0	0.55	998.9	1215	176.97
28/12/2012 8:43	31.62	20.45	63.13	0.54	728.1	1215	185.03
28/12/2012 9:15	28.99	20.02	62.79	0.53	672.6	1215	179.46

Table 2-3-2:Typical Data of Measured Components[temperature, humidity, wind speed, methane and rainfall]

28/12/2012 10:15	31.74	19.65	62.65	0.52	512.4	1215	188.61
28/12/2012 11:15	34.31	20.75	0	0.48	514.5	1215	203.95
28/12/2012 12:15	30.91	18.86	0.85	0.47	610	1215	189.99
28/12/2012 13:15	27.58	19.7	1	0.55	804.5	1215	173.36
28/12/2012 14:15	28.74	19.92	0	0.55	927.7	1215	175.73
28/12/2012 15:15	30.33	19.38	63.52	0.54	660	1215	185.5

Note: #Rainfall data is cumulative. The same rainfall value means there was no rain. #Water level data is the depth from underneath the canal to the water surface.


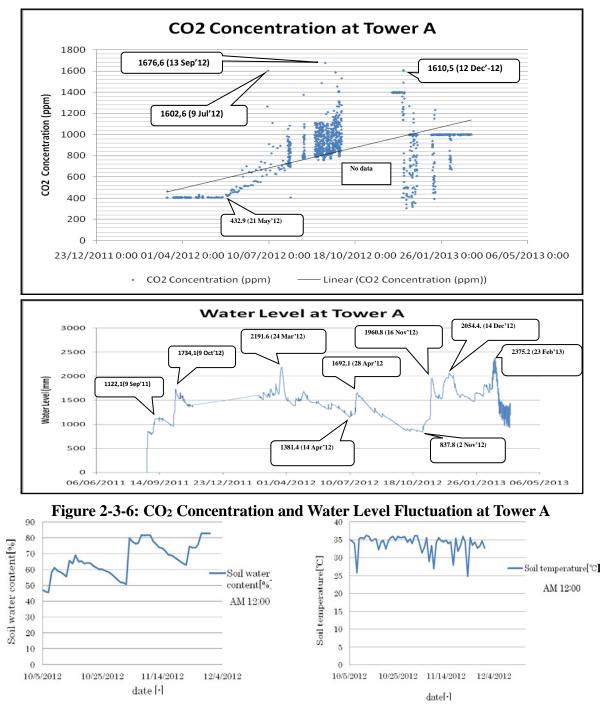


Figure 2-3-7: Soil Water Content and Temperature at Point D



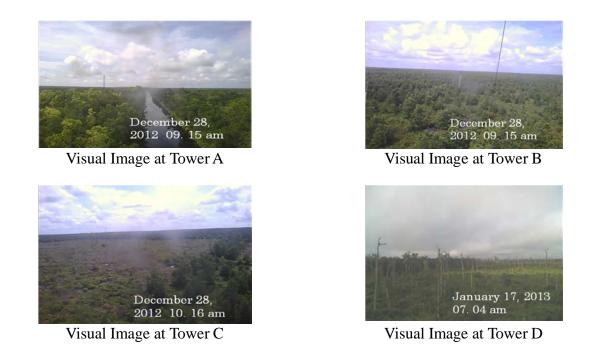

- c) A high speed data link, which is called the PASOLINK system, was established to connect the Data Center to the CIMTROP office so that all the data collected at measurement points A, B, C, and D may be monitored at the CIMTROP office in University Palangka Raya.
- d) To test a new firefighting method, an experiment using soap-based firefighting foam was conducted on the peatland. The soap-based fire-fighting foam was newly developed in Japan and is expected to prevent and extinguish peat fire. The effect of the fire-fighting foam is monitored by the soil sensors installed at Measurement Point D.

Performance evaluation of fire-fighting foam

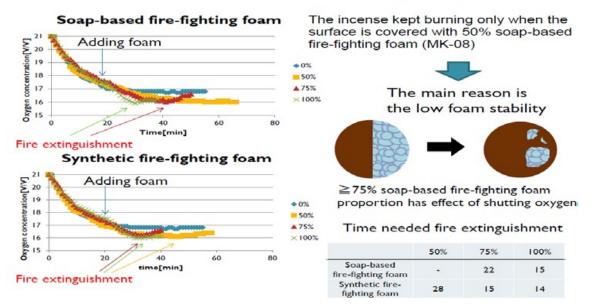


Figure 2-3-9: Performance Evaluation Between Soap and Synthetic Firefighting Foam

e) A Telecenter was established in the building next to the CIMTROP office to provide e-Education

services to the residents who live near the peatland.



Participants from Senior High SchoolResidents from the VillagesFigure 2-3-10: e-EducationServices for the Residents

2.3.7 Benefits of Introduction

- a) Using the ICT remote monitoring system, the researchers can see the visual image of the dam and get the data collected by various sensors for the measurement of water level, temperature, humidity, wind speed, rainfall, methane amount, CO₂ amount, soil temperature, and soil moisture without having to go to the peat land site.
- b) The monitored data from each measurement point will be useful in designing the dam and blocking the canal to restore the hydrological status of the damaged peatland.
- c) The project team conducted a feasibility study towards the establishment of an ICT remote monitoring system in a rural area. The team could also make young researchers and scholars of the University of Palangka Raya to be familiar to the remote monitoring system. The system provides them opportunities to enhance their understanding, knowledge, and skills about ICT technologies and to implement ICT technologies for environmental monitoring.
- d) At the Telecenter, e-Education services were provided to the residents who live near the peatland. We have conducted classes for farmers, students in elementary school, students in high school, and college students. They were taught introduction to the internet and basic knowledge on e-Education, and also to understand the environment and the importance of peatland conservation.
- e) Based on the experiment using soap-based firefighting foam, it was proven that the firefighting foam shuts off oxygen and radiant heat so that the surface fire can be extinguished, but the soil underground was still smoldering. Based on the analysis of the collected data, we will continue to improve its efficiency and conduct more experiments using firefighting foam in the peatland.

2.3.8 Future Prospects

- a) Utilizing the results of the APT-J2/J3 project activities, it is expected that in the future, the Indonesian Government (Central and Local) through the University of Palangka Raya would establish a wide-area remote monitoring system for the restoration of the peatland.
- b) These activities could demonstrate the successful promotion of an e-Environment community with ICT solutions that will be recognized as a best practice to be replicated and scaled-up in rural areas in Indonesia and other APT members' countries to bridge the digital divide in remote and rural communities.
- c) In considering who will be responsible for the maintenance of the regionally and globally

important monitoring systems established, we should consider how we can work and contribute together so that this facility will continue to work and collect data so that we do not lose the investment.

2.4 e-Healthcare Solution in Indonesia

- APT J3 in Indonesia: "Promotion of e-local community with ICT solution in Indonesia" ICT Development Programme for Supporting ICT Pilot Projects in Rural Areas 2008 [J3]

2.4.1 Background of the Project

The TTC Promotion Committee is engaged in providing system solutions to the challenges of the modern society, such as digital divide and economic disparity in rural areas of Southeast Asia, through the SHARE concept.

This Project studied methods to improve healthcare services in Tanah Datar, West Sumatra, Indonesia, where 350, 000 people are living but with only one hospital and some small local clinics. The number of doctors is about 50 and they work without any PCs or databases connected to the network. All departments in the hospital and clinics operate independently from one another and all medical documentation processing was handled manually.

This Project established the "Health Checkup Service" that allows automatic collection of the height, weight, and blood pressure data from measuring instruments and puts them into a database, as well as the "Healthcare Contents Distribution Services" that provides prevention of epidemic diseases such as Pandemic Influenza, dengue fever, etc.

2.4.2 Objectives

The overall objective of this project is to demonstrate the successful promotion of e-local community with ICT solutions that will be recognized as a best practice to be replicated and scaled-up in rural areas in Indonesia and APT member countries to bridge the digital divide in remote rural communities.

The project aims:

- 1) To develop and implement a community-based wide area network by connecting a hospital, a healthcare center, a telecenter, a university, high schools, and junior high schools with a broadband access system to utilize e-healthcare, e-education, and e-agriculture solutions by providing the internet accessibility to rural communities.
- 2) To evaluate the effectiveness, efficiency, and sustainability of this community-based broadband telecenter and try to propose the best practice of the telecenter to be replicated and scaled up in the other rural communities in Indonesia and other APT member countries.
- 3) To enhance and improve implementation and maintenance skills among prefectural government staff to successfully establish and sustain ICT infrastructure and applications.

2.4.3 Project Site

Tanah Datar Regency, West Sumatra Province, the Republic of Indonesia has been chosen as the project site for the "Promotion of e-local community with ICT solution in Indonesia".

Tanah Datar, located at the heart of West Sumatra Province, is the smallest of the 19 regions in this province. Fig 2-4-1 shows the geographical location of the Regency.

General information on Tanah Datar Regency:

- a. Regency government office location: Batusangkar
- b. Administrative units: 14 Sub-districts, 75 Villages, 395 Small Villages
- c. Population: 343, 993
- d. No. of households: 86, 424
- e. Area: 1333.3 sq km

- f. Average temperature: 20~25 degrees Celsius (Highlands)
- g. Main industry: Agriculture (70% of the population)
- h. Regency's GDP: IDR 3.39 Trillion (2006)

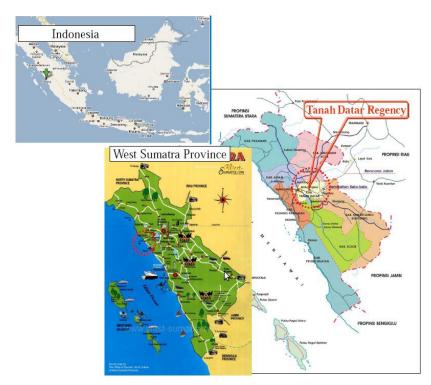


Figure 2-4-1: Location of Project, Tanah Datar Regency, West Sumatra, Indonesia

2.4.4 Partner Organization

- Ministry of Communication and Information Technology (KOMINFO)
- The Telecommunication Technology Committee (TTC)
- · Oki Electric Industry Co., Ltd. (OF Networks Co., Ltd.)
- Fujikura Ltd.
- Dinas Hub, KOMINFO (ICT Management Division) of local government in Tanah Datar Regency
- · Dinas Kesehatan (Health Agency) of local government in Tanah Datar Regency
- PT Jaring Lawah Cyber (PT. JL Cyber)
- PT. Fujitsu Indonesia
- International Office, Nippon Telegraph and Telephone East Corporation (NTT-EAST)
- The National Institute of Informatics (NII)

2.4.5 System Configuration and Installation Sites

The project provides a very basic health check-up system in remote rural areas for the trial of a centralized health data management system with simple health consultancy and disease information services, which is also the public information service for the local community.

Wi-Fi system is adopted as an access network for this pilot project in Batusangkar, Tanah Datar, and optical LAN system is installed by using FTTH technology at Tanah Datar Prefectural Office and Government Office Complex in Pagaruyung. System configuration and the sites of installation are as shown in Fig 2-4-2.





Antenna Unit Installation




Antenna Tower at Data Center



Preparation of Tower Installation

Equipment Installation



The system specification, network equipment, and construction period of the Wi-Fi system and optical LAN are as shown in Table 2-4-1.

		i i i System an				
	System specification	Ne	Construction Period			
Wi-Fi	Maximum Distance:	- Wireless To	40 days			
System	4500 m	- Lightning p				
	Transport speed:	- Wireless Ra				
	27 Mbps, Best Effort	- 5.8 GHz An	tenna			
	1 /	- 2.4 GHz Ac				
		- 2.4 GHz An	tenna			
Optical	Total Distance: 4.1 km	Optical	Telephone Pole	1st Construction:		
LAN	1st construction: 1.3km	Outside Plant				
	2nd construction: 2.8km		Outside Plant Single mode optical cable for aerial installation			
	Transport speed:		14 days			
	100 Mbps, Best Effort		5			
	1 /					
		Network	- 19" Rack system	1 st Construction:		
		Equipment	- GE-PON OLT	3 days		
			- GE-PON ONU	2 nd Construction:		
			- Layer 2 Switch	2 days		
				2		
Server		- 19" Rack sy	/stem			
system		- GENSET 5	000 Watt for Data Center			
		- UPS 3000V	A for Data Center			
		- Computer S	erver for Data Center			
		-	agement for Data Center			
		- Switch for I	Data Center			

Table 2-4-1:	System Specification, Network Equipment, and Construction Period of the
	Wi-Fi System and Optical LAN

One of the reasons that made it easier to successfully implement both Wi-Fi system and optical LAN is that a single agency is responsible for issuing permissions or licenses for both Wi-Fi system and optical LAN.

2.4.6 Outline of the Solution

2.4.6.1 Health Checkup Application

The measuring instruments for health checkup service consist of blood pressure meters, weight scales, and height scales. These pieces of equipment have the Bluetooth communication capability (Class 1, Version 1.2). Measured data are sent automatically to a local PC via Bluetooth and stored in a local database of the PC and also copied to an integrated healthcare database at Data Center. Bluetooth connectivity can lessen the burden to local workers of coping with new and additional tasks for medical checkup and facilitate the familiarization process with the operating instructions. The application was optimally customized and developed for data analyses and to assist the progress of the local people.

The health checkup operation procedure is composed of the following 3 steps:

Step1: Registration of patient

- Step2: Measurement
- Step3: Measured data entry

According to the evaluation results of this procedure, it typically takes 3 minutes to complete the procedure for revisiting patients and 7 minutes for first visits.

2.4.6.2 Administrative Cloud Service

By utilizing the network infrastructure consisting of Wi-Fi network and optical LAN, Tanah Datar Regency installed the Financial Information System (SIMDA) developed and provided by KOMINFO as an administrative cloud service to improve the work efficiency of associated workers in every regency.

The objectives of "SIMDA" are to support the realization of good governance and a clean government in the regional economic administration especially in financial implementations, and to realize professional, transparent, and responsible regional government facilities connected with the optical LAN infrastructure established by the project. Associated workers have been able to use this networked "SIMDA" on an online basis.

The functions of 'SIMDA' include compiling financial reports as part of financial management accountability using budget credit balance reports, cash flow reports, and notes to the financial statement according to the government regulations on standard government accounting; and producing other comprehensive financial reports such as statements of regional financial position, financial performance and regional government accountability on regional financial management, and the Internal Affairs Minister Regulation on regional government management guideline.



The Health Checkup Application Used on Clinics



The Administrative Cloud Service Program

2.4.7 Benefits of Introduction

Throughout the project, clinics, schools, and governmental agencies in Tanah Datar Regency are networked and connected to each other over Wi-Fi system and optical LAN. As a result of the implementation of the applications described in Section 2.4.6, improvement of administrative services was observed and recognized among residents and local government agencies.

- a) Establishment of fundamental computerization for local community with ICT solutions
- b) Introduction of necessary infrastructure for expansion of health or medical services
- c) Improvement and upgrading of work efficiency at local government, and introduction for expansion or upgrading of administrative services to be provided to local community

2.4.8 Conclusion

APT J3 project in Tanah Datar was successfully handed over and its report was completed and submitted to the APT Secretary.

In the Tanah Datar case, the local governor conducted this project as one of the most important policies and formed a special team for the project. This team has been making great efforts to maintain the infrastructure and applications working normally. Two years after the completion of the APT-J3 project, the local government decided to expand the optical LAN and it was implemented successfully with the project members' support.

Throughout this project, Indonesia's 1st implementation of a municipality-based solution model, Health Checkup and Administrative cloud service is achieved.

Regarding its future prospects, Tanah Datar Regency plans to keep working together in cooperation with TTC in utilizing ICT development in the region.

-33-

2.5 e-Disaster Risk Management in Philippines

-APT J2 in Philippines: "Broadband wireless for disaster operations: resilient networks and reconfigurable information systems for rapidly deployable disaster response" 2012 APT J2

2.5.1 Background of the Project

In 2013 alone, natural disasters in the Philippines included Typhoon Haiyan, known locally as typhoon Yolanda, the deadliest Philippine typhoon on record, and a magnitude 7.2 earthquake that caused great destruction in Bohol province. In response, DOST-ICTO and the Ateneo de Manila University spent a considerable time looking for various ways to address communication problems resulting from damaged communication networks caused by natural disasters. In times of calamities, there is a need for immediate communication of information in order to minimize damage and loss of human life, and to provide evacuation updates and other vital information to those concerned.

2.5.2 Objectives

We envisage the design of a BBW (broadband wireless) network that is very resilient and rapidly deployable for quick end to end information flow from affected areas right up to the war room. The system has to be able to carry effective broadband content, to prepare communities, especially persons with disabilities (PWDs), during the critical pre-disaster planning and preparation periods, and for effective response immediately upon the onset of disasters and over the long term recovery effort. There is a critical need for systems designs that offer broadband access solutions to disaster risk management, assessment, rescue, medical treatment, survivor

support system, resource allocation, and long term recovery.

2.5.3 Project Site

This project was planned and conducted in the laboratory in Ateneo de Manila University, Philippines.

2.5.4 Partner Organization

- ICT Office, Dept. of Science and Technology-DOST, Philippines
- Philippine Long Distance Telephone Company (PLDT), Philippines
- Ateneo Innovation Center (AIC) and ECCE Department, Ateneo de Manila University, Philippines
- Advanced Science and Technology Institute (ASTI), DOST, Philippines
- Vastnet Inc., Philippines
- Ionics Inc., Philippines
- Keio University, Japan
- · Oki Electric Industry Co., Ltd, Japan
- Mitsubishi Electric, Japan

Other partners that were gained over the course of the project include:

- Daisy Consortium; Assistive Technology Development Office (ATDO), Japan
- National Council for Disability Affairs (NCDA); National Library of the Philippines (NLP)
- RBI Resources for the Blind; Physicians for Peace, Philippines

2.5.5 System Configuration

Figure 2-5-1 shows a future system architecture for a possible Phase II(*) implementation, highlighting the different components of an information network suitable for disaster risk reduction and management. In this architecture, War rooms are the disaster information sources and have the function of delivering such information to disaster sites and other sites. War room can be constructed by IPTV headend equipment and/or ISDB-T narrow band broadcasting system (shortly, ISDB-T Narrowcast). The disaster related information to the disaster sites includes timely critical information for evacuation and short searchable video of survivors. ISDB-T narrowcast may broadcast several channels as survivors, rescue, relief, and so on.

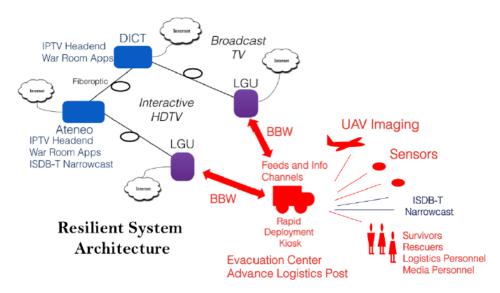


Figure 2-5-1: Future Wireless System for Pre-Disaster Preparation and Post Disaster Rescue and Recovery

NOTE - Phase I means this project. Phase II is the successor of Phase I. There is not any concrete plan as of February 2015.

Figure 2-5-2 details the sub-systems necessary for an end-to-end information delivery system that incorporates in a hybrid manner many key wireless and broadband technology components that can prove critical for our application: one set communications, IPTV standards based content delivery, WiFi and other wireless (such as TV white space), as well as headend technologies that include realtime encoding, web streaming, rapidly deployable mobile media servers and transcoders. Rapidly deployable components such as laptop based media servers (instead of rack mounted technologies), mobile transcoders, and one segment receivers.

Figure 2-5-3 shows the terminal devices that received Wi-Fi and ISDB-T narrow band broadcasting in Figure 2-5-2.

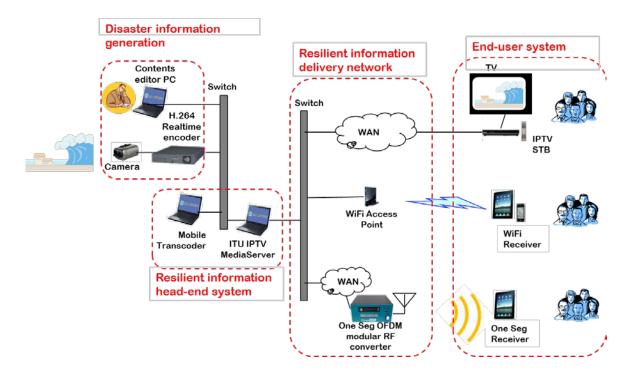


Figure 2-5-2: Proposed Experimental System for Test Deployment at the Ateneo de Manila University Testbed Site



Figure 2-5-3: Mobile Terminals That Receive ISDB-T Narrow Broadcast and IPTV streaming Over Wi-Fi in the Testbed Site.

For the system architecture, the following key components have been identified:

- (1) End to end standards based system software and hardware
- (2) Rapidly deployable and transportable components
- (3) Low power content appliances at the deployment site
- (4) Ability to provide necessary content even in low bandwidth environments
- (5) Inclusive content design and delivery, PWDs are a critical part of the community addressed

2.5.7 Benefits of Introduction

To meet these design goals, we have put together a series of proof of concept sub-systems that have the necessary capabilities and concluded the project with the following accomplishments:

1. Standards based (ITU) IPTV platform head-end architecture

- 2. Near-cloud edge architecture
- 3. TV White space non-commercial-frequency wireless platforms
- 4. A hybrid approach that marries current technologies and standards based approaches in a mission critical capable content streaming platform: iptv.ateneo.edu.
- 5. A successfully concluded consultation and needs analysis process culminating in an international conference.

The IPTV platform was architected to function either as a head end or as a rapidly deployable node, utilizing ISDB-T standard and portable components. At the edge of the deployment, small form factor low power (<10 Watt) near cloud capable network appliances with full-up computer capabilities deliver and gather information at full bandwidth while updating metadata via the narrowband pipes often available in remote rural areas or in post disaster recovery sites. With the lead of the ICT Office of DOST, a test deployment using TV White Space frequencies, a developing standard, was implemented in post-earthquake areas in Bohol Island. While all this design and development work was ongoing, we configured a publicly accessible streaming capability via the iptv.ateneo.edu site to test new content and engage the DRRM community. In parallel we started a consultation process with multiple stakeholders, such as post disaster camp managers and the PWD community, which culminated in a UN ESCAP Sendai International Conference which was participated in by the PWD Community with remote online participation in panel discussions by the Manila Group, convened by this APT Project Team.

2.5.8 Conclusion (Future Prospects)

APT J2 project in Philippines was successfully handed over and its report was completed and submitted to the APT Secretary.

In this Philippines case, an Academia, Ateneo de Manila University, and a government organization, DOST, conducted this project as one of the most important topics regarding disaster information delivery. The project installed a prototype system of RESILIENT NETWORKS AND RECONFIGURABLE INFORMATION SYSTEMS based on an international standard based IPTV system and ISDB-T narrow band broadcasting system.

Throughout this project, the team identified design goals and we have put together a series of proof of concept sub-systems that have the necessary capabilities and concluded the project with the accomplishments.

Regarding its future prospects, the project members plan to keep working together and to consider utilizing ICT development in the region, such as e-learning for hospitals based on IPTV (patient safety topics), and so on.

2.6 Shrimp Water Quality Monitoring in Vietnam

-APT J2 in Vietnam: "Heterogeneous Wireless Sensor Network Monitoring Water Condition for Strengthening Aquaculture Industry in Vietnam" 2014 APT J2

2.6.1 Background of the Project

Monitoring water condition by ICT technology is very important in aquaculture industry. Basically, the methodology of monitoring system is similar. However, the implementation depends on the requirement of a specific application. Therefore, it may incur much effort in terms of hardware and software developments for various applications. Currently, each existing system for monitoring water is designed for a specific application. There are no systems that can support vast of applications. It causes the following problems regarding water condition monitoring:

- 1) It is difficult for the government to have overall view.
- 2) It is difficult for companies to manage business.
- 3) It is difficult for farmers to share knowledge.

2.6.2 Objectives

The aim of this project is to strengthen Vietnam aquaculture industry by applying ICT technology in monitoring aquaculture water and in sharing experimental knowledge. This project proposes a system dealing two issues:

- Real-time water monitoring system lets farmers know what happening in their farms.
- Knowledge sharing system for increasing farmers' technology capability

2.6.3 Project Site

The project was planned and conducted at Faculty of Computer Science and Engineering, Ho Chi Minh City University of Technology. Additionally, the system was planned to deploy for testing in several areas in the south of Vietnam.

2.6.4 Partner Organization

- Ho Chi Minh City University of Technology (HCMUT), Vietnam
- Department of International Cooperation, Ministry of Information and Communications, Vietnam
- The Telecommunication Technology Committee (TTC), Japan
- Nippon Telegraph And Telephone Corporation (NTT), Japan
- The University of Electro-Communication (UEC), Japan

2.6.5 System Configuration

Figure 2-6-1 shows the overall architecture of our proposed system that consists of three parts. The first part of proposed system is **monitoring devices**. The system supports different monitoring devices with different network capabilities. Each device class appropriates for a specific application requirement. They are classified into three classes, as below.

• High speed monitoring class (HSMC): devices belong to this class have a high-computing capacity and high-speed WiFi. HSMC devices are suitable for applications requiring high data rate such as audio, video monitoring. One application example is looking for operating of sea lobster cave underwater. These devices require much energy, high cost, and complex in

deployment. They always require power line connection for long-time operating and often need a wired internet access which is not always available everywhere.

- Mobile-over monitoring class (MMC): devices belong to this class use mobile network services such as short message service (SMS), general packet radio service (GPRS), 3-G communication infrastructure. In addition, MMC devices require less power and has lower data rate than HSMC devices. Medium-size batteries provide enough energy for a device. In addition, mobile network is pre-deployed almost everywhere in Vietnam. Therefore, MMC devices are suitable for application require medium data rate such as monitoring water parameters. Drawbacks of MMC devices are long latency and not reliable communication so that they cannot be used in applications need fast reaction to changing of water condition.
- Energy-harvesting monitoring class (EHMC): devices belong to this class use low-power, shortdistance, low data rate 6LowPAN to form a multi-nodes local wireless network. A local mesh network provides high data reliable and low latency. The power consumption is also very small such that a small solar energy harvester is enough. These features make EHMC devices suitable for monitoring application requiring real-time, high-reliable and fast response such as shrimp farm monitoring. Drawback of EHMC devices is that they cannot provide data remotely. An EHMC network often combines with one MMC device to allow remote data access.

The second part of the proposed system is the **data center server**. All monitoring data are collected to a server for remote accessing and knowledge sharing. The server has a data management system to organize data, manage user privacy and data access policy. Informative analysis is also provided. An integrated framework allows users watch monitoring data each other, ask questions, give advices, discuss issues, and find solution, etc. New farmers quickly catch modern technology, growing process, and experiential knowledge. Farmers not only monitor their farm but also learn to apply new technology into their work with supporting from the proposed system.

The third part of the proposed system is **the user-friendly application on smart phone**. There are large number of Vietnamese still cannot use internet. They do not know how to use a personal computer as well as open or interact with a website. Smart phone with touch interface is much easier to learn and more interested to them.

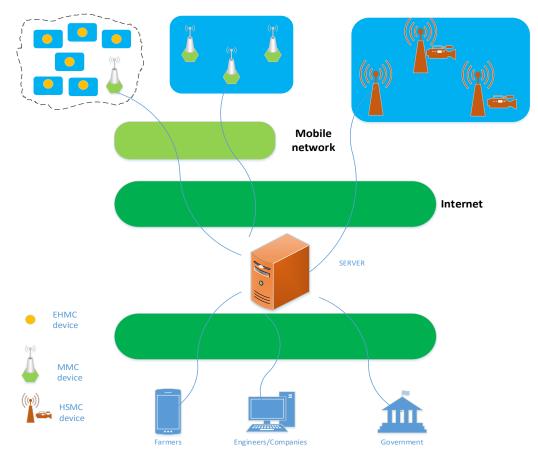


Figure 2-6-1: Overall architecture of proposed system

The implementation results including hardware devices (EHMC, MMC, Web and Mobile Application) of the proposed system are shown as snapshots in Figure 2-6-2, 2-6-3, 2-6-4, and 2-6-5.

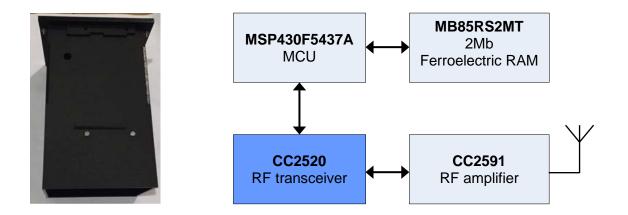


Figure 2-6-2: Block diagram of the processing components inside an EHMC device

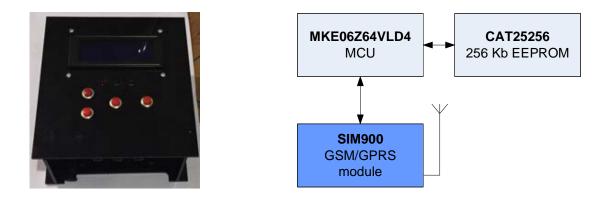


Figure 2-6-3: Block diagram of the processing components inside a MMC device

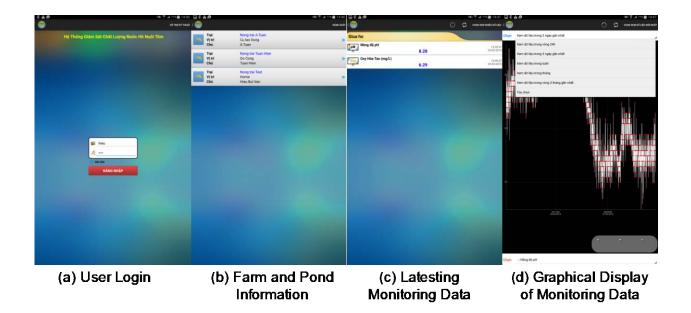


Figure 2-6-4: Monitoring on Mobile Application (Android)

000 () D	www.i3s.edu.vn/swm/admin/home.php C 🗅 🔿 +
C.S.E HCMUT	Trang admin Chào mừng admin Đăng xuất
	Quản lý người dùng Quản lý nông trại
	Quản lý gateway
© 2014 C.S.E HC	иuт 🖬 ¥ 8+
000 (D) [E]	www.3s.edu.vn/system/charl/?famid=16&areald=21&time_mode=all C
C.S.E HCMUT	Trang chủ Giới thiệu Liên hệ Chảo mừng hieu Đăng xuất
Tổng quan dự án	
Trạng thái hệ thống	O Độ pH của nước 🗉
	M M M M M M M M M M M M M M M M M M M
	7.5 4. jan 6. jan 8. jan 10. jan12. jan14. jan 16. jan18. jan22. jan 26. jan28. jan 30. jan1. Feb 3. Feb 5. Feb 5. Feb
	-4. Jan 11. Jan 25. Jan 27. Jan 28. Fe
	pH-water Oxi-water Nổng độ Oxi hòa tan trong nước ■
	N N A
	MAMMAMMAMMAMMAMMAM
	4. Jan 6. Jan 8. Jan 10. Jan12. Jan14. Jan 16. Jan 18. Jan22. Jan 26. Jan28. Jan 30. Jan 1. Feb 3. Feb 5. Feb Feb
	4; Jan 11; Jan 11; Jan 25; Jan 25; Jan 1; Peb 16, Fe
	pH-water Oxi-water
© 2014 C.S.E HCMUT	13 y 8
$\bullet \bullet \bullet < > \square$	www.38.edu.vn/system/status/Harmid=16&areald=21 🔿 🗄 🕘 +
C.S.E HCMUT	Trang chủ Giới thiệu Liên hệ Chào mừng hieu Đãng xuất
Tổng quan dự án	
Trạng thái hệ thống	Điểm Giữa hồ
	# Tên thiết bị Giá trị (Đơn vị) Thời gian
	1 Độ pH của nước 8.56 () 2016-02-08 19:51:31 2 Mag đã ông họa tạo trans nước 4.78 (num) 2016 02-08 19:51:31
	2 Nổng độ Oxi hòa tan trong nước 4.78 (mg/l) 2016-02-08 19:51:31
@ 2014 C.S.E HCMUT	G ¥ 8 [,]

Figure 2-6-5: Web-based Application and Management

2.6.7 Benefits of Introduction

The proposed system has potential to reduce cost including electricity cost and food cost directly, processing chemical indirectly which helps in increasing income for farmers. Basically, the cost of growing shrimp is shown as Figure 2-6-6 where food is the most cost (consume 50% total cost), while shrimp seed and processing chemical are the next costly (17% and 16% respectively). Next costly is electricity which consumes 7% total cost.

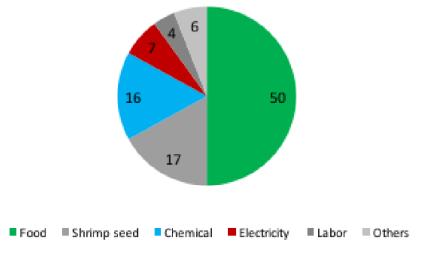


Figure 2-6-6: Cost consuming for growing shrimp

With deployment evaluating result, farmers can reduce working time of rotators. Without the system, farmers often turn on all rotators almost 24 hours a day. Using information from the system, farmers can turn off rotators when dissolved oxygen is in good condition. Hence, working time of rotators is reduced approximately to 18 hours/day. Figure 2-6-7 shows electricity cost of one pond during one season crop by million VND (22.000VND / 1 USD). The light color is amount of saving cost when applying the system. The electricity billing can be reduced up to 14.6 million VND for one 6-rotator pond (from the peak 58.3 to 34.0) or 33% in best case. Consequently, our system directly reduces total cost 2.31%.

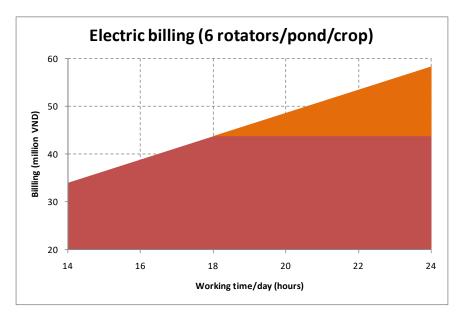


Figure 2-6-7: Electric billing reduction for one pond using 6 rotators

In normal condition, shrimp eating mostly depends on environment temperature and dissolved oxygen. Farmers often feed more than shrimp need. With feedback from our system, farmers adjust fed food suitable so that all food are used which reduce most costly. In addition to direct affection, indirect cost reduction processing chemical can be utilized from our system. Because farmers do not overwhelm food, toxic contaminant such as NH3, H2S do not be generated. The growing environment becomes fresh so that less processing chemical need. Shrimp also become stronger, no more chemical need. In addition, shrimp quality is better which increasing income.

2.6.8 Conclusion (Future Prospects)

This project has proposed a uniform system that integrating different device types to monitor water quality for all different requirements of aquaculture industry. All monitoring data are collected remotely to a data center in real-time manner. Different user agents such as farmers, engineers, companies, government access monitoring data in different views depending on privilege policy. An easy-to-use mobile application is developed for farmers to view monitoring data. The system has been deployed and evaluated in different testing sites. It has worked as expected.

The result shows that electricity billing can be reduced up to 33%. Food and processing chemical can be reduced as well. More research needs to evaluate how much food and chemical cost can be reduced. The remaining issues are to improve dirty deployment environment and high maintenance complexity. They increase system reliability and reduce working time.

2.7 Smart City Application Case Study in Asia-Pacific Region

-APT Publication: "Research about Policy Making regarding "Smart City" in Asia-Pacific Region" Publication of Research for Information Sharing on ICT Policy and Development in 2016 APT

2.7.1 Background of the Project

Smart city becomes a popular topic in each country of the Asia Pacific region. Some countries are starting their urban policy development whereas other countries are promoting their urban policy development of the smart city application. Today, the smart city concept has become key in bridging academic researches, projects and commercial initiatives exploring the role that new ICT services and products can play in increasing the quality of life (QoL) of citizens in urban life. However, a lot of different operationalizations, approaches and definitions of smart city exist and a lack of overview in thinking about the concept of smart city carries on today.

The ICT policy development on smart city is not limited to focus on the urban areas. It should be also applied to the rural areas. The urban policy development of smart city is closely related with the policy making of each country, in which this point is different from other projects such as e-agriculture, e-learning, e-commercial, and so on, Hence the collection of case studies regarding smart city application according to the smart city policy making of each country can be gainful and informative for an efficient and comprehensive guidance for designing and implementing the vision and policies of smart city application in the rural areas.

For this purpose, a survey framework was circulated to capture various APT governance in Asia Pacific region that delivers the benefits based on guiding principles of the implementation and operation for the smart city application. Besides that, a workshop was conducted to enrich the information gathering through sharing relevant knowledge and discussion of the ideal situation in rural areas among those who responded the survey framework about the policy making regarding the smart city application. This project is to solve the following problems regarding the smart city application:

- 1) It is difficult for the intergovernmental organization specialized in the ICT field in Asia-Pacific region to have an overview of the smart city policy making of each country; and
- 2) It is difficult for municipalities or governments to introduce, implement and operate the smart city application in particular in the rural areas.

2.7.2 Objectives and Scope

The objective of this project is to guide the future municipalities or governments to introduce the smart city application to the rural areas. Besides that, to foster the regional cooperation for urban and rural developments of smart city application, the aim of this project collects the case studies on the policy making regarding the smart city development from those pioneering countries and share the latest information about the efficiency and effectiveness of the smart city implementation and operation in the urban areas. Thus, the concrete scopes of this project are as follows:

- Introduction of smart city concept and its related international standardization activities;
- Assessment of survey and workshop on the case studies of smart city application in Asia Pacific region; and
- Guidance of implementation and operation for the policy making regarding smart city application.

2.7.3 Project Site

This project does not have a project site, whereas this project was planned to capture a survey framework from various APT governance in Asia Pacific region. This project was also organized a workshop in the TTC Conference Room, Shiba Koen Denki Building, Tokyo, Japan to review the information gathering through sharing relevant knowledge and discussion of the ideal situation in rural areas among those who responded the survey framework about the policy making regarding the smart city application.

2.7.4 Partner Organization

- · Japan Advanced Institute of Science and Technology (JAIST), Japan
- Nippon Telegraph And Telephone Corporation (NTT), Japan
- NEC Corporation, Japan
- Oki Electric Industry Corporation Limited, Japan
- The Telecommunication Technology Committee (TTC), Japan

2.7.5 Guidance of Implementation and Operation

This section describes an eclectic information for steering the guidance of implementation and operation on the policy making regarding smart city in Asia Pacific region. Because the implementation of smart city is mainly conducted in urban areas with the aim to improve the QoL by using the state-of-the-art informatics and technologies to meet the urban communities' needs, a QoL gap in between rural and urban areas has widened. Therefore, this section is to facilitate increased understanding on the policy making regarding smart city in order to ensure that the rural communities would experience the same QoL benefits of the urban communities. In other words, the objective of this section is to shed light on how the of implementation and operation of smart city application via the operating model.

In the context of business management, project management has taken the top-down and/or bottomup approaches and adapted it towards projects planning. As top-down planning is still prevalent in many organizations, the bottom-up planning method is also widely used. In the context of smart city, the main different in between the top-down and bottom-up approaches is the participation of citizens and stakeholders. The top-down approach promotes a high degree of coordination, whereas the bottom-up approach allows more opportunity for people to participate directly. **Figure 2-7-1** shows the difference between top-down and bottom-up approaches to encouraging the participation of citizens and stakeholders in smart city application.

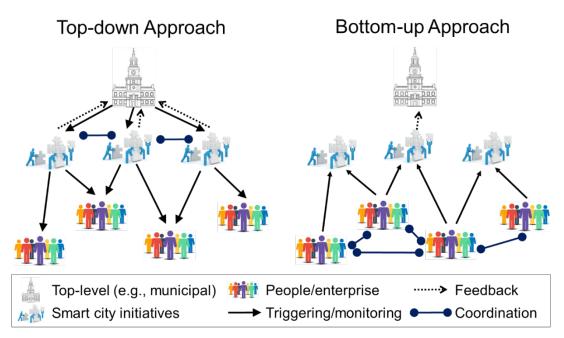


Figure 2-7-1: Top-down and bottom-up approaches to encouraging the participation of citizens and stakeholders in smart city application

In this section, an operational model is defined as both an abstract and visual representation (model) of how a municipal or government implements, operates, and commercializes the vision, policies, strategic initiatives, tactical decisions of the smart city application for better QoL of its citizens. Regardless of the initial introduction of smart city application in either rural areas or urban areas, in principle, the process of smart city application would go through the four-step operational model as shown in **Figure 2-7-2**. The four steps are introduction, implementation, operation and commercialization.

In the step of smart city introduction, the characteristics of smart city should be clarified well of what is – and what is not – being considered in the implementation of smart city. One example of smart city characteristics is that smart city collects increasing amounts of open and inclusive data about city life to support effective actions and decision making in real-time manner. Need is an expression of something desired by humans whereas a requirement is a formalized statement of some functionalities. The need and the requirement contribute an output and an outcome, respectively. One example of smart city needs is that the urban or rural communities require a better QoL.

To accomplish the smart city need, the requirements of smart city are the usability and accessibility of technological needs, the openness of collected data, the role of government involvement, the well-concluded policy making, and the sustainable of financial support. These requirements will be explained in the following section. A plethora of requirements is required to be functioned along with the building the smart city application in both urban and rural areas. Upon the requirements, the policies are made according to a vision, challenges and strategies of the smart city application.

In the step of implementation preparation, at least the following four considerations should be taken into account when the smart city planning is initialized. First, the vision highly requires to be revised in conjunction with the analysis of smart city, in which the analysis includes the characteristics, needs, requirements, and policies of the smart city application. Second, formulation of business outline and the outline of operating organization are prepared and checked. Finally, a consensus is obtained before the implementation of smart city application.

In the step of operation, there is the following considerations in operation if the implementation of smart city application is successful. The formulation of measures or indicators is essential for evaluating the entire smart city application; therefore, they should be examined. Those indicators can

refer to the international standard specification, e.g., ITU-T Y.4901/L.1602 and ISO 37120. Furthermore, the operating model is required to be specified for smoothing the coordination within the entire organization. Additional initiatives for the purpose of sustainable smart city may be considered for a long-term basis.

In the step of commercialization, many issues can be popped out within and outside the operational main organization body. Besides that, the tax duties should be clarified well of what is – and what is not – being tax upon the service usages of smart city application. In addition, the personal data have to be secured and well-manageable. The personal data can be distributed to many other sources for any use, or re-use purpose. In this case, the releasing of open data must be systematically and properly managed via any newly technologies.

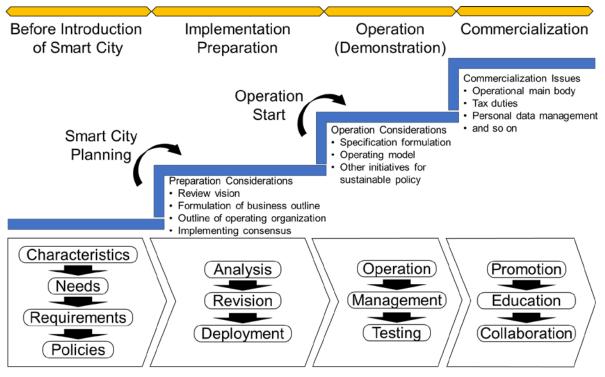


Figure 2-7-2: The four-step operational model of smart city application

Figure 2-7-3 illustrates how the role and responsibility for strategic, tactical and operational management are assigned across the different levels within the municipal or the government. Vision that is the need and desire to transform the city into a smart city with a better QoL is decided by a mayor of a municipal or a government. Then, a set of policies, strategic initiatives, and tactical decisions that is used to accomplish the vision are designed, produced and reviewed by a policy planner. The policy planner also determines the objectives of individual enforcement units to realize the strategic initiatives that have been made at the decision-making level. Next, a planning executor formulates a set of measures or key performance indicators (KPIs), which are based on the standard specification of smart city to execute all the initiatives and decisions. Lastly, a practitioner promotes the business affairs of smart city application when the smart city application is operating.

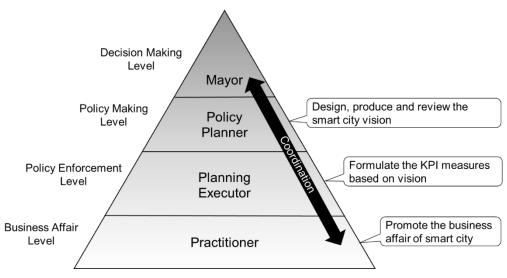


Figure 2-7-3: People involvement of municipalities or governments

Why a smart city is successful and what elements contribute to its success? In fact, all the smart city implementations have a mixture of participants in governments, commercial industry and civil society, but the position and nature of participation varies, as do the roles of the participants. The participant of citizen and relevant stakeholders is important to ensure the success of the smart city application. Besides that, an operational approach that is significantly important to ensure the smoothness and manageable of the smart city operation. In the context of this research report, the operational approach consists of three different types, i.e., vision-embodied type, problem-solving type and integrated type. The participation of these three types is different and depends on the basic top-down and/or bottom-up approaches. **Figure 2-7-4** shows the classification types of operational approach.

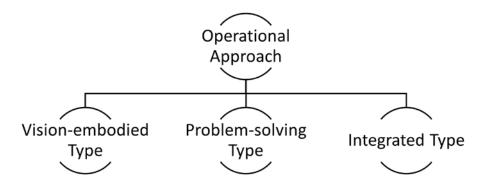


Figure 2-7-4: Classification of operational approach

The vision-embodied type that is a top-down approach promotes a high degree of coordination, whereas the problem-solving type that is a bottom-up approach allows more opportunity for people to participate directly. The integrated type is a combination of both vision-embodied type and problem-solving type. The attempt of integrated type, in which citizens and relevant stakeholders involved, ensures that all people who are affected by or interested in a certain issue have the potential to influence processes and decisions on this issue, or at least have access to relevant information. This might be organized by accessing to a central data hub (e.g., platform) as well as by the construction of a knowledge management system which allows a cross-linking of knowledge of sectorial developments.

Furthermore, the advantages and disadvantages of vision-embodied type, problem-solving type, and integrated type are summarized in **Table 2-7-1**. In the integrated type, the participation from citizens

and stakeholders play a role as a kind of feedback, which gives high feasibility of milestones and initiatives in the smart city application. The integrated type also allows an easy to communicate with each other within the operational municipal or government, which is composed of relevant departments. As a result, the integrated type always guarantees an involvement of all layers of citizens and municipalities; therefore, its applicability is higher than others. The only disadvantage of the integrated type is that an additional cost and time spent for running the feedback mechanism, which depend on the size of the participation. **Table 2-7-2** illustrates the examples of challenge and strategy for top-down and bottom-up approaches of the integrated type.

	Vision-embodied	Problem-solving	Integrated
	Type	Type	Type
Advantages	 Provide early	 Requirements and	 Feedback from citizens
	insurmountable risks and	initiatives are well-	and stakeholders gives
	enormous opportunities Within the operational	specified at the early stage Because those activities	high feasibility of
	municipal is composed of	cover the running cost in	milestones and initiatives Within the operational
	relevant departments, it is	the business model, it can	municipal is composed of
	easy to communicate with	be expected to make a	relevant departments, it is
	each other Services can be managed	profit Operation and	easy to communicate with
	from one central to keep	management are	each other Involvement of all layers
	oversight on many	controllable regardless of	of citizens and
	divergent aspects	the change of person	governments is high
Disadvantages	 Cost and time spent for measuring, what is not measuring are too high Concerned about sustainable policy continuation when the person in charge in the municipal changes Defining requirements and initiatives can be excessive before next step 	 All requirements and initiatives must be known upfront Methodology created and used for each problem- solving are identical No independent enterprise can well-fit and accept the entrusted contracts that based on the purpose of the project 	• Additional cost and time spent for running the feedback mechanism

Table 2-7-1: Advantages and disadvantages of vision-embodied type, problem-solving type, and integrated type

Table 2-7-2: Advantages and disadvantages of vision-embodied type,problem-solving type, and integrated type

		Challenge	Strategy
	own ach	Reduce administrative cost in the feedback mechanism	Improvement of cost usage by visualization
Type	Top-down Approach	Contribution of participation to policies, initiatives and tasks within the municipalities	Implementation of smart city's policies, initiatives and tasks to all the layers of citizen
Integrated Type	ottom-up Approach	Improvement of residents' services	Regional revitalization based on CSV (creation of common value) and providing regional redemption structure
	Bottom- Approae	Improvement of residents' consciousness	Enhancement of smart city awareness through dissemination of service usage to residents

2.7.5.1 Vision-embodied Type

In the vision-embodied type, the vision is clear at the initial stage of the smart city implementation. It uses the top-down approach that introduces the policies, initiatives and objectives to be addressed in order to realize the smart city application. In **Table 2-7-3**, the review outcomes conclude that the approaches in Papua New Guinea and Myanmar are belonging to the vision-embodied type.

2.7.5.2 Solving-problem Type

In the problem-solving type, a citizen problem assumed to be clear at the first place. For example, the transportation services lead to heavy traffic in daily life of a city. To deal with this, the problem-solving type uses a bottom-up approach to addressing the manifested issue clear among the citizen. In **Table 2-7-3**, the review outcomes summarize that the approaches in Iran and Viet Nam are fall into the problem-solving type.

2.7.5.3 Integrated Type

Effective smart city operation needs to balance both top-down and bottom-up approaches. On another occasion, collecting the information by sensors, cameras, and smart devices and taking policy actions by the top-level leadership may require the top-down approach during emergencies. On the other hand, improving the city transportation services with citizen participation may require the bottom-up approach at any time. In **Table 2-7-3**, the review outcomes summarize that the approaches in Malaysia and Thailand are classified as the integrated type of operational model. Due to the feedback mechanism regardless of the top-down approach or the bottom-up approach, the feedback is cycling to address the vision of the smart city application. In the next following sections of this research report, the analysis and review of the city-specific solutions excerpted from the case studies of Malaysia and Thailand are used to describe the contribution of the implementation and operation of a smart city.

	Vision-embodied Type	Problem-solving Type	Integrated Type
Review Outcomes	 An administrative vision is indicated A top-down approach that presents the issues to be addressed in order to realize the smart city application 	• A bottom-up approach that is addressing issues to be solved in order to deal the problems manifested in the specified smart city application	 An administration vision is indicated A feedback mechanism of citizen participation is established Both top-down and bottom-up approaches are cycling to addressing problems of smart city application
Examples	 New smart city planning for a new ecosystem area Examples: New city at Paga Hill, Port Moresby, Papua New Guinea New vehicle registration system, a RFID-based vehicle registration and control system in whole country of Myanmar 	 Developing a new infrastructure for supporting the smart city application Examples: Bus rapid transit (BRT), a public bus transportation in Tehran, Iran Traffic enforcement system, a vehicle traffic violation system in Bac Giang Province, Viet Nam 	 Managing and operating vast complicated smart city initiatives in entire country Examples: Low carbo lifestyle blueprint for Iskandar city's carbon intensity emissions by 2025, Malaysia Smart city for Phuket island's smart tourism by 2020, Thailand

Table 2-7-3: The review outcomes and examples based on the questionnaire responses

2.7.6 Benefits of this Project

In summary, this project has introduced the characteristics, needs, requirements, and deployment of the policy making regarding the smart city application by using the operational model, which is simple but powerful model that can address well the process of implementation and operation in the smart city application. The operational approach also can help to deepen understanding of the implementation and operation of the smart city application in terms of vision-embodied type, problem-solving type, and integrated type. Especially, through the study on the integrated type, we could understand that governments' role in the cases like Malaysia and Thailand. The governments exclusively determine the smart city vision and initiatives internally, and they ask for feedback from citizens and businesses. Lastly, it is concluded that adaptation of explicit and efficient operational model and approach on the policy making regarding the smart city application with stakeholder consensus and active participation from citizens, businesses and governments is the key to successful smart city implementation and operation.

2.7.7 Conclusion


The contributions of this project firstly has introduced smart city concept and its related international standard activities. Second, this project has shown an assessment of survey and workshop on the case studies of ongoing smart city application to the countries of Asia Pacific region, which are starting/promoting the smart city policy making by sharing the information of other pioneering countries in Asia Pacific region for guiding future directions of policy making on smart city application. Third, this project has presented an efficient and comprehensive guidance of the implementation and operation procedures on the policy making regarding the smart city application.

This project has focused on the introduction of smart city concept and its related international and national standardization activities. Since the urban policy development of smart city is assumed to be commonly applied within each country in Asia Pacific region, useful and gainful information based on the actual activities in the starting/promoting countries about the implementation and operation know-how on the smart city application have been collected and analyzed in this project. As a result, this project has achieved its primary objective in providing an efficient and comprehensive guidance on the future smart city policy making of municipalities or governments in the rural areas of Asia Pacific region.

2.8 ICT utilization for end epidemic of Tuberculosis in Myanmar

2.8.1 Background of the Project

According to the world statistics, tuberculosis (TB) is the top single cause of death among infectious diseases. Considering this situation, the United Nations General Assembly decided to hold first-ever high-level meeting on the fight against tuberculosis, under the theme "United to end tuberculosis: an urgent global response to a global epidemic" on 26 September 2018. The meeting aims at accelerating efforts in ending TB and reaching all affected people with prevention and care. It was agreed to reconfirm the commitment to the Sustainable Development Goals of the end epidemic of Tuberculosis in 2030.

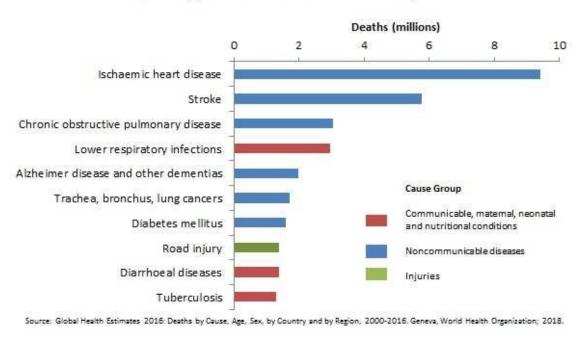

Top 10 global causes of deaths, 2016

Figure 2.8.1: Top 10 global causes of deaths, 2016

Myanmar is one of the TB high burden countries categorized by World Health Organization (WHO). In 1998, WHO published the initial list of 22 high burden countries including Myanmar which defined based on the burden of TB in absolute terms. At this time TB was barely on the global health agenda. The aim in creating the list was to highlight the scale of the global TB epidemic, by focusing on a small number of countries responsible for 80% of the total number of TB cases worldwide. The 22 high burden countries were defined as those countries with the highest absolute burden of TB in respect of the estimated number of incident cases.

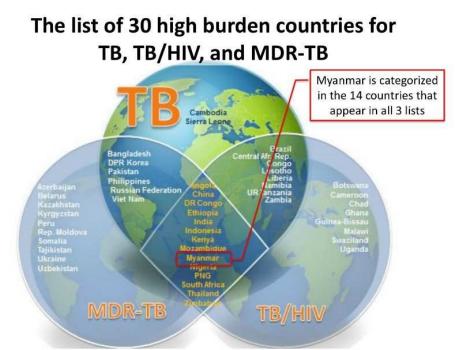


Figure 2.8.2: The list of 30 high burden contries for TB, TB/HIV, and MDR-TB

By 2015 it has been realized that there were advantages but also disadvantages to the lists. One particular disadvantage is that the main high burden country list was based on absolute burden, so countries with very high rates per head of population were not included. So it was decided in 2015 that the lists would be revised. After a period of consultation, it was decided that there would still be three lists for the next five years.


It was also decided that each list would contain 30 countries using a "20 + 10" approach. This meant that the countries would be the top 20 in terms of absolute numbers of incident cases, plus the ten countries with the most severe burden in relative terms that did not already appear in the top 20. There would also be a threshold of a minimum number of 10,000 cases per year for TB and 1,000 per year for TB/HIV and MDR-TB. This would avoid any of the lists including countries with a very small number of cases.

The three lists are to be used from 2016, and Myanmar appearing in all three lists. Many patients are still suffered from TB in the community.

It is a global strategy of measures to prevent transmission to other people by early detection and treatment. When we find the 75% of TB infected peoples and treated 80% of them successfully, the number of TB patient will be reducing. However, Stop TB Program set the new 90-90-90 target to reach the end epidemic goal of SDGs. Reaching 90% of people with TB and putting them on treatment, reaching 90% of the key populations, and achieving 90% treatment success.

THE 90-(90)-90 TARGETS

- Reaching 90% of people with TB and putting them on treatment
- Reaching 90% of the key populations*
- Achieving 90% treatment success
- * Disaggregated data is not available except TB/HIV



※ Case findings (Diagnosis) & Treatment Success (Monitoring) are always Key Indicator of TB program

Figure 2.8.3: The 90-90-90 Targets

This strategy requires the accurate data system that enable to capture the patient for whole course of the treatment starting from diagnosis to the end of treatment. However, spread of multidrug-resistant tuberculosis (MDR TB) made it difficult to take measures in the field. Before the MDR era, the diagnosis and monitoring the treatment was simple. When the patients with TB symptoms come to the TB clinic, the patient's specimen was examined for the smear examination which available at almost all the TB clinics and found to be positive, treatment for TB will be started. The whole flow of TB diagnosis and treatment has been provided at one stop services.

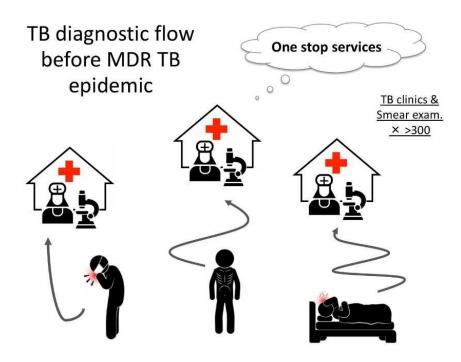


Figure 2.8.4: TB diagnostic flow before MDR TB epidemic

However, epidemic of MDR-TB changes the flow of diagnosis and treatment of TB patient. All the

smear positive case should sent the specimens to higher level laboratory for screening the drug susceptibility, especially for Rifampicin, key drug of 1st line regimen. New diagnostic tool of GeneXpert made it available with in the day, but not all the TB clinic has it. And if the GeneXpert result found Rifampicin resistant TB, the patient will be treated as MDR TB and further examination of culture will be required for drug susceptibility and monitoring the treatment effectiveness, that is only available at three reference laboratories in the country.

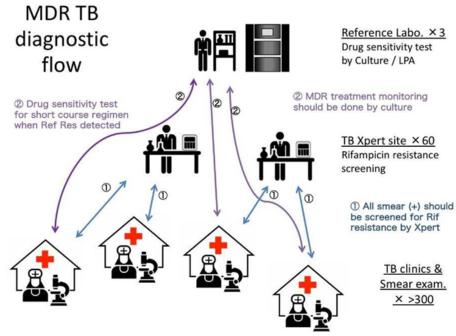


Figure 2.8.5: MDR TB diagnostic flow

As a result, diagnosis and monitoring the treatment of tuberculosis became to require laboratory examinations at multiple facilities, and transportation of samples and information among the facilities has been recognized as a challenge.

Other needs of ICT utilization arising from current change of TB control program was accuracy of reporting to monitor the progress of disease control. TB program in Myanmar can receive the external funding support including the Global Fund after democratization. Those external donors require the accurate and timely reporting for monitoring the progress. Particularly, to track the progress in the era of end epidemic goals of SDGs, case-based monitoring and reporting is crucial, because each case should be monitored from diagnosis to end of treatment see the cascade.

Figure 2.8.6 shows the current flow of data using existing HMIS (Health Management Information System).

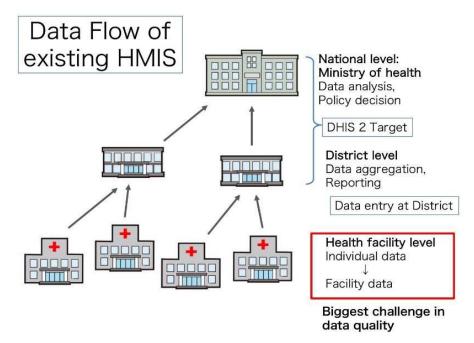


Figure 2.8.6: Data flow using existing HMIS (Health Management Information System)

Individual data was transformed at health facility level into aggregated data for reporting. Those reports were gathered at district level and report to provincial or national level, which is higher level health facility.

Currently, many countries are tiring to introduce the electronic data system including DHIS2, that is mostly used in developing countries for health statistical data system, recommended by WHO. The system was designed to introduce at district level for data collection and entry, and expected to improve the accuracy and timeliness of the reporting.

However, it will not improve the quality of data collected at the health facility, as it's not mastered by the system users.

To meet the high requirement of reporting to external donors including Global Fund, many countries are now trying to introduce the ICT to improve the quality of data at health facilities to collect the individual data.

2.8.2 Objective

To improve the accuracy of data by securing the traceability of information using ICT


2.8.3 Project Site

We discussed with National TB Program and selected the 7 pilot sites in Yangon. One Reference laboratory, two diagnostic centers, and 4 township TB clinics were selected.

Out of 4 TB clinics, two are equipped with GeneXpert, and remaining two are equipped with only smear microscopy. All the township TB clinic are treating only drug susceptive TB cases. Location of each sites are displayed on the map.

Characteristics of each sites are shown in the table.

Name	Category	Laboratory	Treatment
National TB Reference Labo (NTRL)	Reference laboratory	Culture, DST, LPA, GeneXpert, smear	_
UTI TB center	Diagnostic center	GeneXpert, Smear	MDR TB
Latha TB center	Diagnostic center	GeneXpert, Smear	_
Hlaing	Township TB clinic	Smear, (GeneXpert)	DS TB
Tamway	Township TB clinic	Smear	DS TB
South Dagon	Township TB clinic	GeneXpert, Smear	DS TB
Kyimyindaing	Township TB clinic	Smear	DS TB







2.8.4 Partner Organization

National TB Program, Myanmar

2.8.5 System Configuration


2.8.5.1 Current Status

Yangon is the biggest city in the country with about 5.5 million population. National TB prevalence survey in 2018 found the high incidence of TB in the city especially MDR TB.

The city is divided into four districts. The districts combined have a total of 33 townships.

Each township has their TB clinics with smear microscopy and some has GeneXpert for MDR TB diagnosis. There are one of three reference laboratories where culture examination is available. And two diagnostic centers with high-capacity GeneXpert (12 module).

Current flow registering the patients require a lot of paper works. The patients with TB symptoms registered first on outpatient register and laboratory examination request form (TB-05) should be filled in. Then registered in TB laboratory register for smear examination. When smear was found to be positive, patient will be registered in TB register book (TB-03) and case record card (TB-01) will be prepared to record the treatment course.

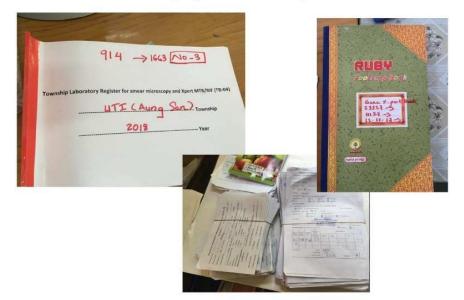

Current paper based systems

Figure 2.8.7: Paper based systems

At the same time, laboratory order form for further screening of drug susceptibility should be used. During the treatment course, laboratory examination to monitor the treatment effectiveness should be conducted at least three times. In each of those steps, medical staffs need to be fill in the patient's name, date of birth, sex, address, and ID number in each form.

2.8.5.2 Approach

We develop the TB laboratory data system to improve the management at TB clinic and accuracy of reporting, and pilot in the TB clinics and laboratories in Yangon.

(1) Requirements of the system;

- User friendly interface; mimicking the same layout of the paper form using a touch panel for easy data entry
- QR code for traceability of specimen and Pt's information between health facilities
- Compatibility with DHIS 2 (Tracker)
- Networking by Mobile data communication (in the future)

The concept of the system is as below;

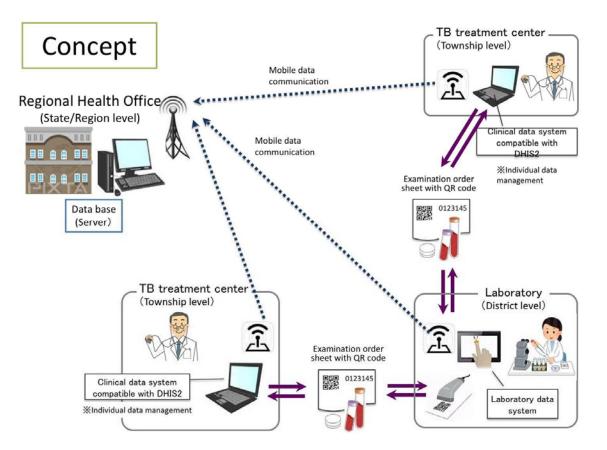


Figure 2.8.8: Concept of the system

Considering the poor network infrastructure, the system uses the QR code to transfer the information to among the facilities. It also expected to reduce the work load of handwriting.

Expected workflow after installation of the new system is as below;

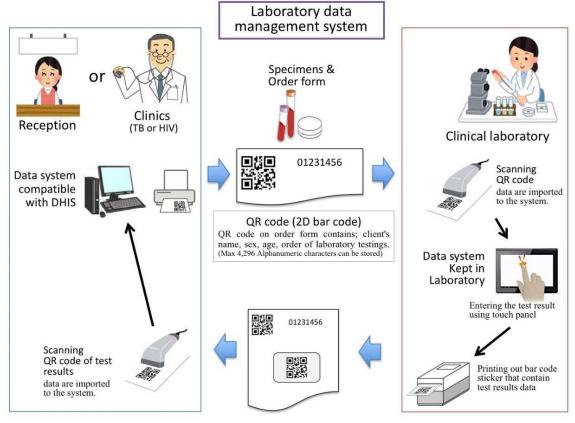


Figure 2.8.9: Laboratory data management system

(2) Design of the system;

The system consists from two (2) databases; one is for Laboratory use and the other is for Clinic use considering the traceability of information. The colors are changed for Clinic and Laboratory for easy understanding.

National	Tuberculous I	Laboratory Sys	tem (CRMa	ite))						
	Registration Laboratory Data										
	Request	Manual Data Entry	Work Sheet		Result Data Transfer		Result Data Entry	1	Man Dat Ent	a	
			Data Sy	ynch	nronization						
	Laboratory Report				Quarterly Report						
										jîca	NCGM

Figure 2.8.10: System Design

When making the design of system, we put emphasis on how users can intuitively understand how to use the system

The menus are located in the three (3) parts from upper to lower for both Clinic and Laboratory. The

upper part is for data registration, modification and reference. The middle part, colored in darker color, is for QR code related operation and the lower part is used for reporting of statistical information for analysis.

There is a gray button "Data Synchronization" between middle part and lower part, which is not yet used in this phase.

As for the middle part for QR code related operation, not only the buttons which are used for scanning QR code in each cases, but also the buttons used in case that staffs receive the paper-based form without QR code, that is, "Manual Data Entry", which is same operation as pressing the plus button (+) under the upper part (1) "Registration", but direct operation is enabled to reduce the waiting time for staffs to open the registration list. In this way, we focus on the system workflow so that the staffs the system can be used both current paper based operation and system based operation, which is paper with QR code.

The data captured by the system is currently only the information captured by the paper based operation, however the data can be added for further analysis for Ministry of Health and Sports (MOHS) or other health organization such as WHO.

Search D Presumptive	Presumptive Date)		TB 🗾 ID (Date)		MDR ID (Date)			Cou
) TB O MDR Hear ID Number 2018 •	Patient Status	0 TB Registered Date	; TB No 0	Name	0 Sex 0 Age	e 0 Address	© Treatment Start Date	0 Start 0 Month 0	
Search	MDR on treatment	22 January, 2018	NTR1-T-2018/000005	TestPatient2			23 January, 21	118 this month	
	MDR on treatment	22 January, 2018	NTR1-T-2018/000004	TestPatient	r		22 January, 21	118 this month	
ailed Search	Moved to XDR TB (MD TB)	R- 22 January, 2018	NTR1-T-2018/000002	Magdalena	F		23 January, 21	118 this month	
däress	MDR on treatment	22 January, 2018	NTR1-T-2018/000001	TestPhase1			22 January, 21	18 this month	
Presumptive TB O MDR			Print TB registe	er List(TB-03)	1 Print Presumptive	e TB Lint			
2018									
From To									
22 Jan, 2018 22 Jan, 2018									
22 Jan. 2018 22 Jan. 2018									
22 Jan, 2018 22 Jan, 2018									
22 Jan, 2018 22 Jan, 2018									

Figure 2.8.11: Sample - Screen image

The following is the screen for requesting the examination order from the Clinic. The form is exactly same as the official form except QR code.

Currently there is no security considered for QR code, as all the information contained in the QR code, is shown in the paper and seen by anybody, so system design is decided like this and the security for QR code will be considered in the next phase.

			-00000005-e01		_	_	_	_	_	_	_	_	-	_	ર 🕁	
rint otal: 2 sheet	of paper Print	Cancel			nan An	ng National 19 March, 2018 Palaost	mination Oss	of biologi	ical spec 			05)				
estination	() Microsoft XPS	Documen		http://		~ 10000	J 104	13 Maryls, 1995	_		N.					
	Change	_			in traded for	18 🗸		□ to √ telapor Loopert	1 8 2 3	-						
ages	• All	8		~	Total	-	Apathus and a hay / OPD		0.04	-						
iyout	Portrait	•			ngaroni			turture V types	MTR/R/	~~~						
slor	Color	*					dan e	_	=	Spie		_				
More set	tings				Lanna .	functionan 1	Visad Spectrum		Arene	2 2N	_	Constrainer				
						-	Ratured anipportant or unhall	-	Scotty		-	-				
nnt using sys	tem dialog (Ctrl+Shift	• •7		famo	elv.		kanar Kanar Kanar									

Figure 2.8.12: Examination order from the Clinic

The QR code can be scanned by clicking the menu with QR code symbol in the initial page;

Scan Request Sheet at Laboratory

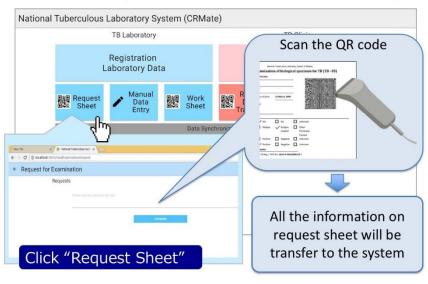


Figure 2.8.13: Scan request sheet

Once the result of laboratory examination is found out to be positive, such patient is diagnosed as TB patient by Clinic and when the doctor click the "TB patient", the TB ID is automatically provided by the system, which can be editable in case of the clinic would like to change the TB ID based on the paper document.

← Patient Rec	cord	TB-NO Name	OSK1-T-2017/0001 yttt		8
	Date of Birth				26 years old
TB Patient Information					
Examination	Address				-
Intensive Phase					Temporary
Continue Phase	Patient IDs				
MDR-TB Phase	Health Facility Gifu Central Hospital			Code OSK	
Outcomes	Presumptive No OSK1-P-2017/00001				
	OPD No.				
(TB-No. OSK1-T-2017/0001				✓ TB Patient
	MDR No.				IDR Patient

Figure 2.8.14: Diagnosis record

There is a function for TB treatment such as drug administration;

Drug Administration

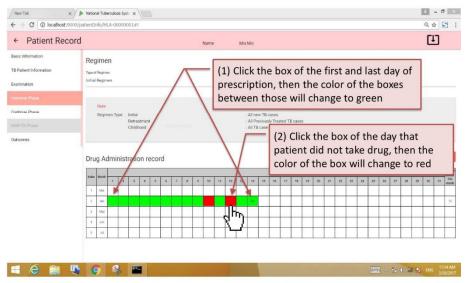


Figure 2.8.15: Drug Administration record

The reporting function is available and it's exactly same as official form used by National level technically supported by WHO.

Reporting function

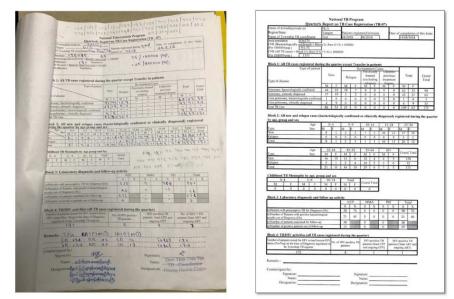


Figure 2.8.16: Reporting function

(3) Introduction of the system and on-site assessment

At the time of introduction of the system, we provided on-site training to the staffs working in the clinics and laboratories. Regular on-site visit to monitor and encourage usage of the system has been provided for quarterly basis. At the on-site visit, we also conducted assessment for further improvement of the system.

On-site assessment includes two components; interview on the staffs for usability of the system and observation of the process, and accuracy of the data by comparing with paper based manual count report. The results of the assessments will be described in next section.

(4) **Results of the assessment**

One of the hindering factors for utilization of the ICT is workload. Therefore, we evaluate the workload of the TB patients in each site. NTRL is busy laboratory receiving lots of order from the wide catchment area as national reference. Most of the specimens are coming from MDR TB centers for culture and drug susceptibility testing. Two diagnostic centers, UTI and Latha, are also busy, because those centers have high-capacity GeneXpert for MDR-TB screenings and received many specimen and patients from surrounding TB clinics. Other 4 township TB clinics are almost same in the number of patients coming to daily clinics.

		NTRL	U	TI	La	tha	Hla	ing	Tan	nwe	Kyimy			uth gon
		Lab.	Clinic	Lab.	Clinic	Lab.	Clinic	Lab.	Clinic	Lab.	Clinic	Lab.	Clinic	Lab.
No. of	Total		80		80		30		30		15		20	þ.
patient	new		40		40		5		5		5		6	
/ day	existin g		40		40		25		25		10		14	
No. of specime	Total	150		120		50		20		20		20		30
	w/QR	3		40		few		5		10		5		7
n/ day	w/o QR	147		80		almost		15		10		15		23
Installat place	tion	Lab.	Recep tion	Lab.	Data regist ration room	Recep tion	Rece (sha tab	re 1	(sha	ption ire 1 let)	Rece (sha tab	ption re 1 let)	Recep tion	Lab.
Examina	ation	Smear /Gene Xpert/ DST/L PA/Cu Iture		Smear /Gene Xpert		Smear /Gene Xpert		Smear /Gene Xpert (recen try)		Smear		Smear		Smear /Gene Xpert

Basic information and work load (July 2018)

In our conclusion, clinic side can update the data system by themselves in addition to daily patient's management. However, busy laboratories are facing the difficulty to update the system in addition to the daily laboratory works. So, if the patient's background information can be transferred to the system by QR code, it seems to be feasible even for the laboratory. Therefore, expansion of the QR code system can be the solition.

Findings in the assessment at three (3) -month after the system introduction and nine (9) - month after the system introduction were shown in the tables.

Items	Assessment result
Introduction	•It takes about 1 month to familiar with the system (All sites)
	•The manual was useful (All sites)
Equipment	•Printer trouble- paper jam, toner (2 sites)
	•Printer is not function due to low voltage of electronic supply (3 sites)
Data entry	•Two sites hire the data entry staffs and others are done by medical staffs
	themselves.
	•Touch panel is easy to handle (All sites)
	•QR code can reduce the data entry work load (All sites)
	•Typo was found in the entered data (3 sites)
Challenge	•Workflow becomes complicated after introducing the system with QR code
	(All sites)
	•Trouble of printers and barcode reader (4 sites)
	•Consumption of papers and toners are high (All sites)
	•Human resource for data entry (All sites)
	•System interface is slightly different from paper form (1 site)
Expectation	• Efficacy of data management will be improved when the system with the QR
	code has been expanded (All sites)

Table 2.8.1:	The assessment result at three (3)-month after the system introduction (Jul. 2017)
--------------	--

Items	Assessment result
Operation	•Parallel operation with paper based and electronic data system in all the sites.
	•Developed data system is effective for patients registration, data entry, and
	sarching. (All sites)
Data entry	•Only two sites can update the data timely manner and others are doing
	altogether at the end of the day.
	•QR code is effective for data transfer (All sites)
	•Only half of the sites feel that touch panel is effective for data entrhy.
Challenge	•Double entries of the patients were found but staffs were not aware of it
	•Data entry to the system was additional workload (Half of the sites)
	•Reporting function of the system was not utilized (All sites)
Expectation	•Efficacy of data management will be improved when the system with
	the QR code has been expanded (All sites)
	•Additional function for usability
	•Sustainable supply of the consumables (papers and toners)

 Table 2.8.2:
 The assessment result at nine (9) -month after the system introduction (Jan. 2018)

Other assessment at on-site visit was comparison of reporting. We compare the number of reported case in the quotably report (TB-07) by manual count of TB register and system developed report.

Table 2.8.3:	Concordance rate between paper based manual count report and system
	produced report (2 nd Quarter 2018)

		New case]	Re-trea	atment					
	New			Relapse		Previously treated		Unknown history		tal	Concordance rate
	Pap	Sys	Pap	Sys	Pap	Sys	Pap	Sys	Pap	Sys	
Pulmonary TB Bacteriological	144	138	49	44	1	1	0	0	194	183	94.3%
Pulmonary TB Clinical diagnosis	131	140	15	17	0	0	0	1	146	158	92.4%
Extrapulmonary TB Bacteriological	0	1	0	0	0	0	0	0	0	1	_
Extrapulmonary TB Clinical diagnosis	42	40	0	1	1	0	0	0	43	41	95.3%
Total TB case	317	319	64	62	2	1	0	1	383	383	100%

Pap: # of cases reported in paper based manual count report, Sys: # System produced report

The assessment found that total number of cases registered in the period is completely matched. But categories of the patients are slightly different. In depth study of this mismatch revealed that some are data entry miss for the system and some are counting error by manual count.

Therefore, we cannot conclude here that ICT introduction can improve the data accuracy, but it can reduce the workload of producing the report by manual count. As you can see in the table, they have to report the number of patient by the categories, not only listed here but also age group, collaborated


NGO referral, and laboratory examination results. Some facility said that it takes few days to produce the quarterly report, while system can produce it with in few second.

2.8.6 Benefits of Introduction


The other observation is strong and weak points of data transfer using the QR code, comparing to the networking. We found three major strong points of QR code data transfer; (1) Interoperability, (2) Traceability, and (3) Enabling gradual expansion.

Strong point of QR code data transfer (1) Interoperability


 Pt's information can be transfer to different system once design of QR code is fixed

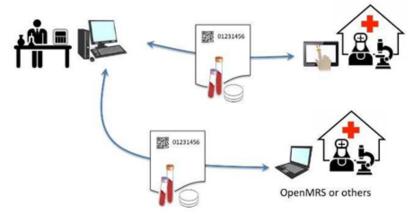

Since there are several data systems are already introduced, interoperability is important. For instance, NGO use their own system for patient management, QR code can connect different system each other, unless they use the same structure QR code.

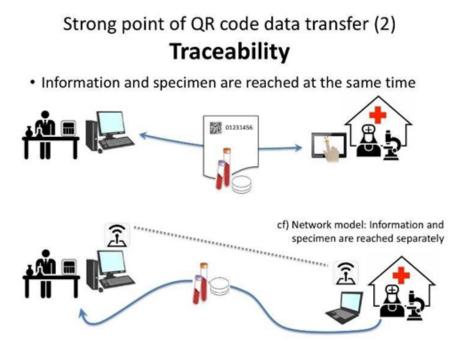

Traceability is also important strongpoint of using QR code. In the case of networking, information and laboratory specimens are moving differently. But, QR code and laboratory specimen are moving together. So, we can trace the specimen using the QR code.

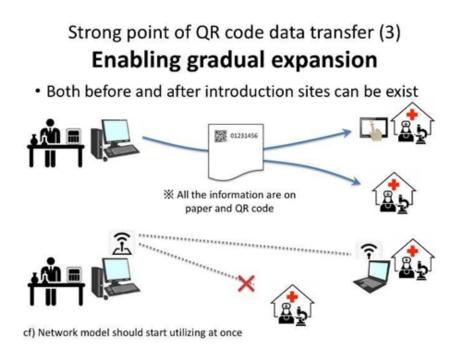

In addition, communication using QR code is enabling the gradual expansion. It can be operated parallelly with the paper-based registration. And documents are remaining after using.

On the other hand, there are several weak points too. For instance, consumption of lot of papers and toners, QR code can be missing before reaching health facilities.

Although infrastructure of telecommunication in Myanmar has been improved rapidly, we thought that communication using QR code for laboratory data system has benefits.

2.8.7 Conclusion

Township TB Clinic are able to update the data system without hiring data clerks. However, TB laboratory faced difficulty in updating the data for orders from private practitioners which require the manual data entry. The Reference Laboratory and Diagnostic centers need the data clerks for orders without QR codes.

Expansion of the system may reduce the workload at Reference Laboratory and Diagnostic centers.

			J.	Summary of ICT Solution			
CATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthcare (1) MYS	e-Healthcare (2) MMR
1. Overview of the solution		 e-Aquaculture systems is a remote environment monitoring system using M2M sensor network at the fish pond in order to suspend the fish kill due to lack of oxygen. 1) M2M sensor network M2M network was built with sensors measuring water temperature, pH, dissolved oxygen (DO), turbidity and conductivity around the lakeshore. 2) Improved the lack of oxygen in the water A water circulation system could be provided to improve the lack of the oxygen in the water. 3) Distribute information system Information distributed to fish folk through a portal site created by an expert. Distributed information includes water parameter, disaster information, market price and cooking information etc. 	The aim of this project is to strengthen Viet Nam aquaculture industry by applying ICT technology in monitoring aquaculture water and in sharing experimental knowledge. This project proposes a system dealing two issues: 1) Real-time water monitoring system Real-time water monitoring system lets farmers know what happening in their farms. 2) Knowledge sharing system Knowledge sharing system is useful for increasing farmers' technology capability.	 e-Education provides a wide variety of functions according to the target area situation and requirement. 1) Introduction of ICT technologies into schools: Introducing internet access environment, school internal network (LAN), PCs and other networked display and operation devices, electronic whiteboards and education-related application systems etc. 2) e-Education materials Multimedia education materials which are delivered via video and still image database, interactive tools and digital playground concept. 3) e-Learning system Self-study systems provided through servers and communication networks, which allows students to study by themselves, remotely and at any time if necessary, using e-Education materials. 4) Remote communication Realizing remote communication environment among children and students, or with teachers, through networks and display devices. 	 e-Environment is a remote environment monitoring system using M2M sensor network in the peatland. 1) It is also effective for dam designs and area maintenance, prediction of fire occurrence, and protection of the peatland. 2) By designing and constructing the monitoring system, the local young ICT engineers have the opportunity to enhance their technical skills on ICT technologies. 3) Using the ICT system, the e-Education service can provide the local residents a venue to understand the importance of peatland conservation and introduction to internet operations. 	 e-Healthcare system provides healthcare –related information, services, and products to patients using the Internet and other relevant networks. The following are cases of e-Healthcare services in rural area. 1) Health checkup service It allows the automatic collection of height, weight, and blood pressure from the scales and puts them into a database. 2) Healthcare Contents Distribution Services It provides opportunity to raise awareness against epidemics such as Pandemic Influenza, dengue fever, etc. by using the e-learning system application contents. 	 e-Healthcare system, the TB laboratory data system, provides improved management at TB clinic and accuracy of reporting. 1) User friendly interface; mimicking the same layout of the paper form using a touch panel for easy data entry 2) QR code for traceability of specimen and Pt`s information between health facilities 3) Compatibility with DHIS 2 (Tracker) 4) Networking by Mobile data communication (in the future)

3. Summary of ICT Solutions

ATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthcare (1) MYS	e-Healthcare (2) MMR
Analysis of the situation and status	a) Purpose and Environment	A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for e- Aquaculture system - main reason of fish kill - which kind of sensor is needed (water temperature, pH, DO etc.) - location of monitoring Survey existing ICT system such as communication networks and PC equipment	A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for water quality monitoring system - Main reasons of shrimp kill - What ICT and aquaculture technology that farmers know - Which kinds of sensors are needed (water temperature, pH, DO, salinity, turbidity, conductivity, H2S, NH3, NO2, etc.) - Locations of monitoring - Which kinds of sensor networks communication networks are needed - Which kinds of power supplies are needed	 A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for e- Education systems. Existence of Internet environment or ICT penetration level in the target area Analysis of rate of child labor Analysis of school attendance rate (necessary to determine readiness for self-study, and the current rate of truancy due to child day- time labor or local economic situation, etc.) The number of teachers per capita (necessary to determine readiness for self-study, from the perspective of teachers) Scope of geographical area where one school should cover (necessary to determine readiness for remote/distance learning) Number of children or students in the area (necessary to determine communication environment among children across a distance) Social surroundings like existence of zoological or botanical gardens (providing alternate education materials for children without such study environments) 	A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for e- Environment system - Construction area - Water level in the canal / peatland - CO ₂ / methane concentration - Rainfall - Temperature and humidity - Wind speed - Local environment setup Survey existing ICT system such as communication networks and PC equipment	 A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for e-Healthcare system. Presence of local Internet access services, and Internet penetration rate Demographic composition by age, literacy rate etc. Ratio of medical institutions (hospitals and clinics) per household and area coverage per medical institution (hospitals and clinics) (to determine the need for remote healthcare services) Availability of regular health checkup services and checkup consultation rate Availability of medical office automation Identification of most common diseases, and records on presence of endemic diseases 	 A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for TE Laboratory data system. Presence of local Internet access services, and Internet access services, and Internet penetration rate Demographic composition by age, literacy rate etc. Ratio of medical institution (hospitals and clinics) per household and area coverage per medical institution (hospitals and clinics) (to determine the need for remote healthcare services) Availability of reporting system (DHIS2) Monthly or quarterly statistical report Availability of medical office automation Identification of most common diseases, and records on presence of endemic diseases
	b) Measures and effect	Based on the above survey, decide what kind of sensor	Based on the above survey, decide what kind of	Based on baseline data, decisions are made to	Based on the above survey, decide what kind of systems is	Based on baseline environmental survey,	Based on baseline environmental survey,

CATEGORY SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthcare (1) MYS	e-Healthcare (2) MMR
	 system is suitable and necessary. Number of fish kill using the system. Improving the income of fish folk. 	 monitoring system is suitable and necessary. Real-time and easy-to-use water monitoring system lets farmers know what happening in their farms Experiments and information sharing Improving the income of shrimp owner based on the collected and analyzed data. 	determine the type of e- Education solution which best fit the contextual needs and challenges identified Relevant reference indices are determined to indicate the quantitative effect or impact of the project goal.	 suitable and necessary. In case of its application to the peatland Effective for prediction of fire and its protection Use of the canal dam design for recovering water supply Also set up some reference indexes and consider the quantitative effect. 	decisions are made to determine the type of e-Healthcare systems or services needed. In addition, selection of specific targets to perform a quantitative review of the results of the implementation.	decisions are made to determine the type of e-Healthcare systems or services needed. In addition, selection of specific targets to perform a quantitative review of the results of the implementation.
c) Business Model	 Survey relevant conditions including the following items to generate and assess a business model for e-Aquaculture services. Considering the purpose of deployment, necessary system and benefits to be expected should be clarified. How much fish harvest was improved using the system and solution. Reduction of manpower costs by saving the time in measuring environmental data Benefits to enhance technical skills of local young ICT engineers and to provide e-Education service to the local residents Costs of system deployment, operation, and maintenance Financial support: who will operate and maintain the system. 	shrimp harvest as well as	 Survey relevant conditions including the following items to generate and assess a business model for e-Education services. At this stage, it is necessary to determine the economic situation of local government or schools, i.e. whether they are able to keep up with the cost of system introduction and run it as local government or school services sustainably. If it is determined that difficulty is predicted in sustaining and managing the project, it is necessary to identify potential financial support from the central government, grants, or other countries. 	 Survey relevant conditions including the following items to generate and assess a business model for e-Environment services. Reduction of manpower cost by saving time in measuring environmental data Benefits of getting useful data on a timely basis (ex. the data for dam design, fire prediction, and rapid fire-fighting for environment conservation). Benefits of enhancing the technical skills of local young ICT engineers and to provide e-Education service to the local residents Costs of system deployment, operation, and maintenance Economic strength of local governments in the region Financial support of the central government or other countries 	 Survey relevant conditions including the following items to generate and assess a business model for e-Healthcare service. Economic readiness of the local residents (whether service fees could be collected from local residents will be sufficient to cover costs for system implementation, operation, and maintenance, etc. As such, it is to be determined if private commercial businesses ran by medical institutions are feasible operators to sustain the e-Healthcare services in the future). Economic readiness of local municipalities and medical institutions (whether the system deployment, operation, and maintenance costs can be covered by municipalities if fees collected from the local residents are insufficient; whether municipalities are capable of the continuous management of the system). Availability of central 	 Survey relevant conditions including the following items to generate and assess a business model for e-Healthcare service. Economic readiness of the local residents (whether service fees could be collected from local residents will be sufficient to cover costs for system implementation, operation, and maintenance, etc. As such, it is to be determined if private commercial businesses ran by medical institutions are feasible operators to sustain the e-Healthcare services in the future). Economic readiness of local municipalities and medical institutions (whether the system deployment, operation, and maintenance costs can be covered by municipalities if fees collected from the local residents are insufficient; whether municipalities are capable of the continuous management of the system). Availability of central

CATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthcare (1) MYS	e-Healthcare (2) MMR
						government or foreign financial aids (whether financial support could be obtained from the central government or other governments if both service fees and municipalities cannot cover the costs).	government or foreign financial aids (whether financial support could be obtained from the central government or other governments if both service fees and municipalities cannot cover the costs).
	d) Cost estimation		Survey electricity	in the environment (existence or	possibility of a power supply, qu	uality of electricity)	
			Survey existing communic	cation network environment (exis	tence and reliability of wired or	wireless broadband access)	
		Survey and compare the damage of fish kill and the investment for system implementation, operation, and maintenance.	Survey and compare the damage of shrimp kill and the investment for system implementation, operation, and maintenance.	 Survey conditions and estimate the cost of introduction, operation, and maintenance of e-Education systems. Required type of systems and services to be introduced, and necessary facilities such as servers and buildings for them; communication network equipment, terminal devices, education materials, and so on. Coverage of area size, population density and distribution Readiness of available teachers or education expert resources in the target area Challenges to establish maintenance system for ICT 	 Survey conditions and estimate the cost of introduction, operation, and maintenance of e- Environment system Presence (or supply potential) of the power supply and power quality Necessary ICT system (center building, communication equipment / terminal equipment) Coverage area and construction difficulty of ICT equipment maintenance system 	 Survey relevant conditions including the following items to estimate costs associated with e- Healthcare system implementation, operation, and maintenance. General description of required system (service details), facilities (center building, telecom facilities, terminal equipment, instruction materials, etc.) Coverage of area size, population density and distribution Readiness of local community members to sustain the e-Healthcare system after deployment Challenges to establish maintenance system for ICT and e-Healthcare systems 	 Survey relevant conditions including the following items to estimate costs associated with e- Healthcare system implementation, operation, and maintenance. General description of required system (service details), facilities (center building, telecom facilities, terminal equipment, instruction materials, etc.) Coverage of area size, population density and distribution Readiness of local community members to sustain the e-Healthcare system after deployment Challenges to establish maintenance system for ICT and e-Healthcare systems
3. Target data, Collection		Collection of the following data.	Collection of the following data.	and e-Education systems Collection of the following data	1) Collection of the following data	Collection of the following data	Collection of the following data
and Analysis		 Water temperature pH Dissolved oxygen (DO) Turbidity and conductivity around the lakeshore. Water circulation 	 Water temperature pH Dissolved oxygen (DO) Turbidity and conductivity of shrimp farms. Water circulation 	 Academic performance of students in local schools Rate of basic literacy and arithmetic knowledge Knowledge about local culture Ability in creative thinking 	 Climatic conditions, carbon dioxide / methane (CH4) concentration Rainfall, temperature, humidity and wind speed Local environment appearance 	 Height Weight Body fat percentage Temperature Blood pressure Pulse rate, and so forth. 	 Result of Laboratory examination for Smear test, Culture, Drug sensitivity test Patient data such as gender age, address

CATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthca
		- Ecology of fish and water pollution	- Ecology of shrimp and water pollution	skills - General student satisfaction rate about learning within the target context	 (in case of the application to peatland) Canal construction area Water level in the canal and peatland Fire generation and frequency 2) Storage technology for the above data and appropriate analysis skills 	
4. Appropriate technology	a) Communication Technologies	Between fisherman household (Telecenter) and fishing community center or university (knowledge center). Needed broadband capacity	GPRS, 3-G communication infrastructure low data rate 6LowPAN, Contiki MAC protocol high-speed WiFi	Select the communication technologies by considering the cost of introduction and usage of each technologies, taking into account the environmental conditions, existing facilities, and possibility of shared usage with other appropriate services, etc. At this juncture, relevant system s are decided to meet the required performance in a cost- sensitive way, not necessarily with regard to leading edge technology. < Area and long distance > • Optical fiber and PON*1 system, metal, microwave and WiFi *1 PON: Passive Optical Network • Satellite communication • Mobile phone data communication service < School connection requirements > • Wired LAN or WiFi • Cable system for broadcast	Communication tool (Wi-Fi and millimeter wave technology)	<regional wid<br="">area> - Optical fiber cable/microv LAN - Satellite com - Mobile phor communicat <situational cu<br="">premise> - Wired/wirel - Broadcastin,</situational></regional>

care (1) MYS	e-Healthcare (2) MMR
vider geographic	 Communication tool (Wired/wireless LAN,
per/metal rowave + wireless	Mobile network, etc.)
ommunication	
one (data cation) services	
customer-based	
eless LAN	
ing system	

CATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthca	
	b) Sensor network Technologies	 Sensor and measuring equipment (Dissolve oxygen, air & water temperature, pH, humidity, and imagery, etc.) Radio wave (such as WiFi) technology Power equipment (solar panel and battery) 	 Sensor and measuring equipment (Dissolve oxygen, water temperature, pH, oxygen, salinity, turbidity, conductivity, and imagery, etc.) A low-power wireless communication protocol (Contiki MAC protocol) for strict power constraint; and high speed WiFi technology Power equipment (solar panel, super capacitor and battery) 	N/A	 Sensors and measuring equipment (Water level, CO₂ / methane concentration, rainfall, temperature, humidity, wind speed, etc.) Radio wave (such as WiFi) technology Power equipment (solar panel and battery) 	(height scale	
	c) Center Facility	 Server technology for storage of collected data Internet server capability to respond to remote area 	 Server technology for storage of collected and analyzed data Web server capability to respond to remote area 	 Data server and storage machines Broadcast server or head- end e-Learning systems (application systems and contents) Relevant multimedia educational materials including pictures, video, sounds, text, etc., interactive tools and digital playground space, etc. 	 Server technology for storage of collected data Internet server capability to respond to remote area 	 Data server a machine Multimedia materials da e-Learning s (application contents) 	
	d) Terminal devices	Personal computers and smart device including GPS function.	Personal computers, and smart devices.	 Personal or shared computers (desktop, laptop or tablets, smart phones, etc.) School devices (displays, sound systems, electronic whiteboards, etc.) 	Personal computers (desk top type)	 Personal or computers (or tablet, sm Facilities of institutes an institutes (vi audio equiption) 	
5. Human			Personnel	who operate ICT system (Refer	to the category 4 - Appropriate t	echnology)	
resource		Personnel who maintain ICT system (Refer to the category 4 - Appropriate technology)					

acare (1) MYS	e-Healthcare (2) MMR
g equipment to ealth checkup	N/A
ale/ weight and cale/ ter/ blood- auge/ pulse	
ge wireless cation technology n) for the data of health checkup	
er and storage ia electric learning database g systems on systems and	1) Data server and storage machines (in the future)
or shared s (desktop, laptop smart phones, etc.) of medical and administrative (visual displays, ipment)	 Dedicated or shared computers (desktop, laptop or tablet, smartphones) QR code scanner Printers to output the order sheet with QR code

CATEGORY	SUB CAREGORY	e-Aquaculture (1) PHL	e-Aquaculture (2) VNM	e-Education	e-Environment	e-Healthcare (1) MYS	e-Healthcare (2) MMR
	CAREGORI	 In order to realize sustainable implementation of e-Aquaculture system, the following human resource should be ensured and cultivated. Experts for design and construction of M2M monitoring system Maintenance personnel of e-Aquaculture system; experts for data analysis 	 farm water monitoring system, the following human resource should be ensured and cultivated. Experts for design and construction of shrimp monitoring system Maintenance personnel of the system; experts for data analysis 	In order to realize sustainable implementation of e- Education systems, the following human resource should be ensured and cultivated. 1) Teachers or education expert resources 2) Maintenance personnel for e-Education systems	 In order to realize sustainable implementation of e- Environmental system, the following human resource should be ensured and cultivated. 1) Experts for design and construction of M2M monitoring system 2) Maintenance personnel of e-Environment system; experts for data analysis 	 In order to realize sustainable implementation of e- Healthcare systems, the following human resource should be ensured and cultivated. 1) Medical doctor or professional health services resources 2) Maintenance personnel for managing medical facility and services (remote medical checkup services) 	In order to realize sustainable implementation of TB Laboratory data systems, the following human resource should be ensured and cultivated. 1) Medical doctor or professional health services resources 2) Health staffs who entry the data 3) Maintenance personnel of
	-	- Teachers or education experts for ICT training and environment education of local ICT engineers and	- Experts for ICT, aquaculture and environment training		3) Teachers or education experts for ICT training and environment education of local ICT engineers and	medical checkup services)	TB Laboratory data system, experts for data analysis
		residents			residents		

3. Summary of ICT Solutions (2 of 2)

Г

CATEGORY SUB CAREGORY		e-Disaster Risk Management	Smart City Application	
		IPTV head-end for broadband and ISDB-T system for wireless are included in the system.	It is difficult for municipalities or governments to introduce, implement and operate the smart city application in particular in the rural areas.	
2. Analysis of the situation and status	a) Purpose and Environment	 A series of surveys are conducted to analyze contextual conditions, which will be instrumental in deciding requirements for e- Disaster risk management system. Existence of broadband access for IPTV services Existence of digital broadcasting for wireless services Frequency of natural disaster in the target area (country) Availability of mobile terminal devices such as smart phone to receive ISDB-T. Availability of IPTV terminal devices such as STB and TV with IPTV functions 	A survey framework are conducted to circulate and capture various APT governance in Asia Pacific region that delivers the benefits based on guiding principles of the implementation and operation for the smart city application. Besides that, a workshop is conducted to enrich the information gathering through sharing relevant knowledge and discussion of the ideal situation in rural areas among those who responded the survey framework about the policy making regarding the smart city application.	
	b) Measures and effect	Based on baseline environmental survey, decisions are made to determine the type of e- Disaster risk management system or services needed. In addition, selection of specific targets to perform a quantitative review of the results of the implementation.	The survey framework scope of the schematic themes that is based on the ISO 37120 standard and its KPIs is used. In particular, five main schematic themes, i.e., energy, environment, education, transportation, and health are focused.	
	c) Business Model	Survey relevant conditions including the following items to generate and assess a business model for e- Disaster	Survey relevant conditions including the following items to generate and assess a business model for smart city	

TR - 1058

CATEGORY	SUB CAREGORY	e-Disaster Risk Management	Smart City Application
		 risk management service. Availability of ISDB-T including head-end system and terminals to deliver emergency information when disasters happens Availability of IPTV services (broadband, head- end and terminals) to deliver emergency information when disasters happens 	application. Benefits to enhance knowledge of municipals or governments to provide smart city application not only in rural areas, but also in urban areas Benefits of sharing informative on the comprehensive guideline of implementation and operation regarding smart city application in Asia-Pacific region
	d) Cost estimation	Survey electricity in the environment (existence or possibility of a power supply, quality of electricity)	N/A
		Survey existing communication network environment (existence and reliability of wired or wireless broadband access)	N/A
		Survey relevant conditions including the following items to estimate costs associated with e-Disaster risk management system implementation, operation, and maintenance	N/A
		- War room specification that delivers the emergency information and also collects the personal and disaster area information.	
		- Coverage of area size, population density and distribution.	
		- Readiness to regulate a small broadcasting system to broadcast disaster information to specific areas.	
3. Target data,		Collection of the following	Collection of the following

TR - 1058

CATEGORY	SUB CAREGORY	e-Disaster Risk Management	Smart City Application
Collection and Analysis		 data Disaster area (potentially dangerous area) Disaster type Disaster date, time Route to Evacuation Number of dead people, their names and other personal information 	 data Primary contact information Name of smart cities Population Main source Current schematic themes for building smart cities Standardization activities or projects Information of smart city application case studies
4. Appropriate technology	a)Communication Technologies	ISDB-T, WiFi and IPTV	N/A
	b) Sensor network Technologies	N/A	N/A
	c) Center Facility	 Data survey and storage machine ISDB-T and IPTV head-end system to deliver information 	N/A
	d) Terminal devices	ISDB-T terminal WiFi terminal IPTV terminal	N/A
5. Human			N/A
resource		In order to realize sustainable implementation of e-Disaster risk management systems, the following human resource should be ensured and cultivated.	N/A
		 Maintenance personnel for IPTV and ISDB-T equipment to deliver disaster information Maintenance personnel for creating effective disaster information to government and persons in disaster areas 	

TR - 1058